

Hawa Concepta III for wooden folding/sliding doors

Flowing transitions make rooms more flexible than ever before

Hawa Concepta III supports the trend towards open living spaces, and creates transitions from kitchen to living room or from workplace to living area in a more fluid way than ever before.

Doors of any size can be pivoted, slid in sideways and parked in an extremely small space, almost in the blink of an eye.

They can then be brought out again with a gentle tap and closed flush with the surface, so that all that remains visible of the kitchen is an aesthetic front. This works so easily and intuitively that it is even possible to dispense with handles.

We weren't just thinking about the users during the development of the Hawa Concepta III: The system impresses with its simplicity, even during installation and adjustment. This is all based on technology that is just as invisible as a kitchen that is currently not in use.



Area of application


Cabinet constructions for multi-functional use of rooms which contain kitchens, home offices, washer/dryer combinations and storage space, which are freely accessible and disappear behind the cabinet front with pivot / slide-in hardware if required.

System advantages


-  **Flexibility** Variable door dimensions: **half-height to floor-to-ceiling solutions** possible, including **walk-on solutions**
-  **Productivity** **Easy installation** thanks to high degree of pre-assembly
Intuitive adjustment with easily accessible adjustment points
-  **Comfort** **Ergonomic movement support** for even, smooth movement
Opening and closing with very little effort – one hand is enough
-  **Aesthetics** Uniform, **flush front design** with even gap pattern
Allows constructions **with and without a handle** – the **technology** remains **invisible**

Installation examples


Hawa Concepta III 25/35 Push

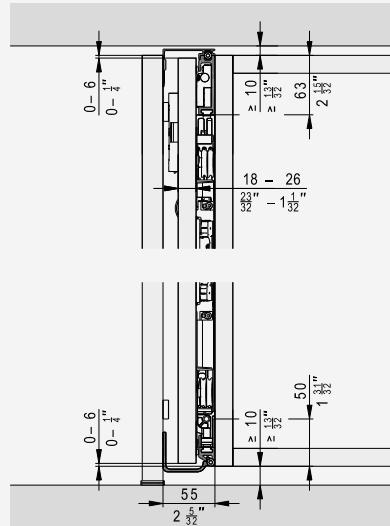


Hawa Concepta III 25/35 Pull

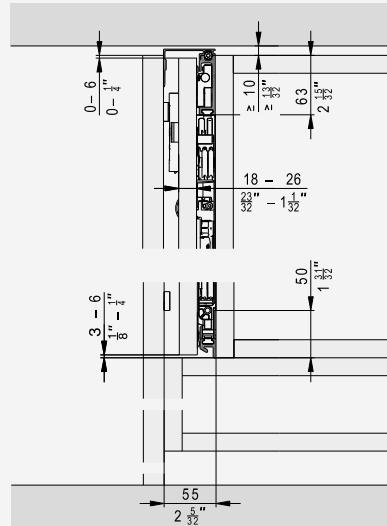


Hawa Concepta 25/35 Push

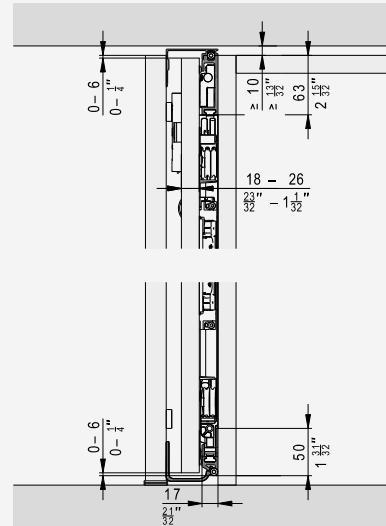


Door striking against the top and bottom cabinet sections



Composed cabinet overlay doors



Overlay door without base



Technical specifications

| | | |
|-------------------------------------------------------------------------------------|------|----------------|
|  | max. | 25/35 kg |
|  | | 1200 – 2700 mm |
|  | | 440 – 750 mm |
|  | | 18 – 26 mm |

Good to know (accessories)

- Connector makes overlaid furniture structures possible
- Straightening fitting for doors


**Fitting for pivoting and lateral sliding in of wooden doors up to 25 kg (55 lbs.).
Uniform, flush front design with even gap pattern. Push-to-open function for handle-less cabinet designs.**

Product highlights

-  **Productivity** Easy installation thanks to high degree of pre-assembly with intuitive adjustment
-  **Comfort** Ergonomic movement support for even, smooth movement
-  **Aesthetics** Cabinet designs without handle – the technology remains invisible



Technical specifications

| | |
|------------------------------------------------------------------------------------|----------------------------------------|
|  | 6–25 kg (13 to 55 lbs.) |
|  | 1200–2200 mm (3' 11 1/4" to 7' 2 5/8") |
|  | 440–750 mm (1' 5 5/16" to 2' 5 17/32") |
|  | 18–26 mm (23/32" to 1 1/32") |


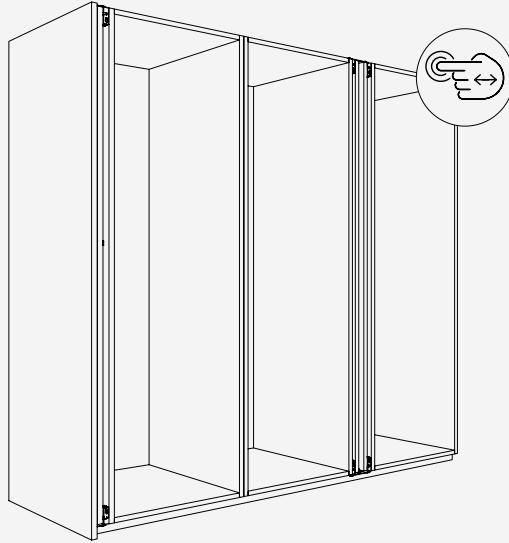


Installation examples

Door striking against the top and bottom cabinet sections

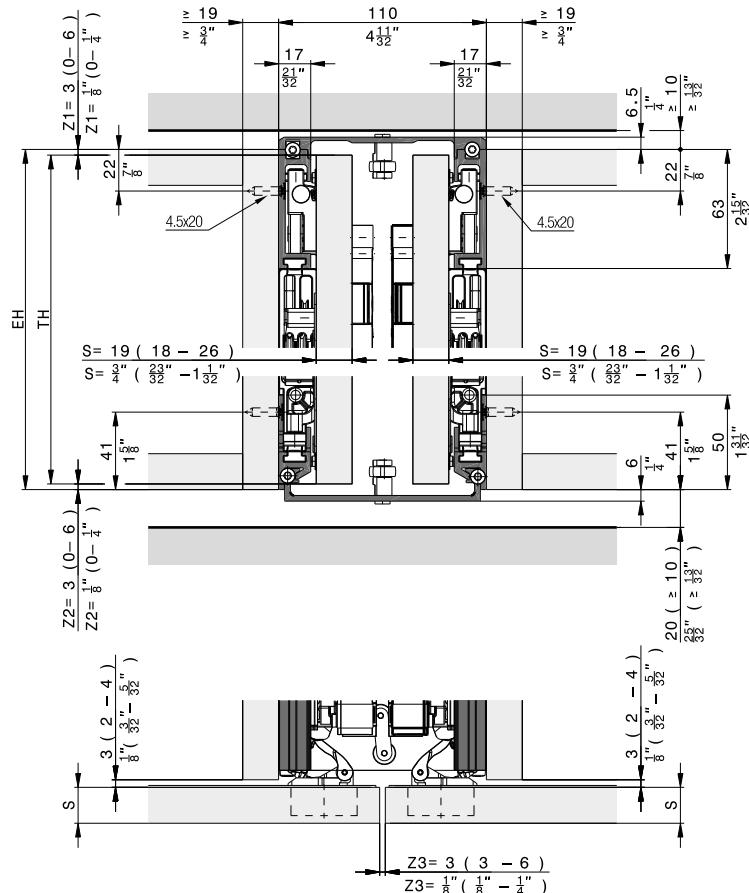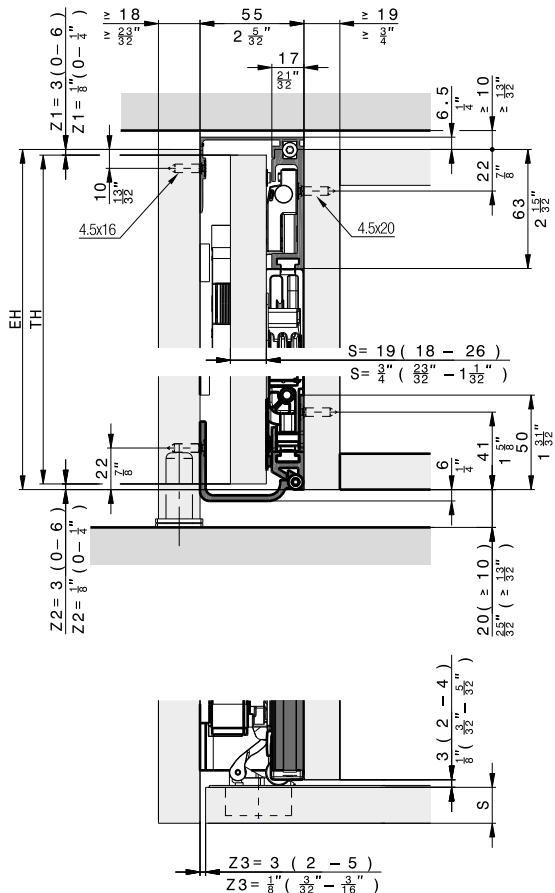

Components required for one cabinet



Hawa Concepta III 25 Push, left

| | No. |
|----------------------------------------------------------------------------------------------------------------------|-------|
| Hawa Concepta III 25, basic set left, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8") | 30994 |
| Hawa Concepta III 25/35, Push slide-in set, left | 30998 |
| Upright profile L= 1974 mm (6' 5 23/32"), for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized | 30778 |

Hawa Concepta III 25 Push, right

| | No. |
|----------------------------------------------------------------------------------------------------------------------|-------|
| Hawa Concepta III 25, basic set right, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8") | 30995 |
| Hawa Concepta III 25/35, Push slide-in set, right | 30999 |
| Upright profile L= 1974 mm (6' 5 23/32"), for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized | 30778 |

Weight and door size ratio calculations

The maximum weight must be adapted depending on the door size ratio.

| DE Türhöhe / FR Hauteur de porte / EN Door height / IT Altezza ante / ES Altura ante / DE Türbreite / FR Largeur de porte / EN Door width / IT Larghezza anta / ES Ancho de puerta | Maximum weights in kg / EN Maximum poids en kg / ES Pesos máximos en kg | | | | | | |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------|-----|-----|-----|-----|-----|-----|
| | 440 | 500 | 550 | 600 | 650 | 700 | 750 |
| 2200 | 25 | 25 | 25 | 25 | 25 | 25 | 24 |
| 2150 | 25 | 25 | 25 | 25 | 25 | 25 | 23 |
| 2100 | 25 | 25 | 25 | 25 | 25 | 24 | 23 |
| 2050 | 25 | 25 | 25 | 25 | 25 | 24 | 22 |
| 2000 | 25 | 25 | 25 | 25 | 25 | 23 | 21 |
| 1950 | 25 | 25 | 25 | 25 | 24 | 22 | 21 |
| 1900 | 25 | 25 | 25 | 25 | 23 | 21 | 20 |
| 1850 | 25 | 25 | 25 | 24 | 22 | 21 | 19 |
| 1800 | 25 | 25 | 25 | 23 | 21 | 20 | 19 |
| 1750 | 25 | 25 | 25 | 22 | 21 | 19 | 18 |
| 1700 | 25 | 25 | 24 | 22 | 20 | 19 | 17 |
| 1650 | 25 | 25 | 23 | 21 | 19 | 18 | 17 |
| 1600 | 25 | 24 | 22 | 20 | 18 | 17 | 16 |
| 1550 | 25 | 23 | 21 | 19 | 18 | 16 | 15 |
| 1500 | 24 | 22 | 20 | 18 | 17 | 16 | 15 |
| 1450 | 23 | 21 | 19 | 17 | 16 | 15 | 14 |
| 1400 | 22 | 20 | 18 | 17 | 15 | 14 | 13 |
| 1350 | 21 | 19 | 17 | 16 | 15 | 14 | 13 |
| 1300 | 20 | 18 | 16 | 15 | 14 | 13 | 12 |
| 1250 | 19 | 17 | 15 | 14 | 13 | 12 | 11 |
| 1200 | 18 | 16 | 15 | 13 | 12 | 11 | 11 |

| DE Türhöhe / FR Hauteur de porte / EN Door height / IT Altezza ante / ES Altura ante | Maximum Gewicht in kg / FR Poids maximal en kg / EN Maximum weights in lbs. / IT Pesi massimo in kg / ES Pesos máximos en kg | | | | | | |
|--------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|-------------|-------------|------------|-------------|------------|-------------|
| | 1' 5 5/16" | 1' 7 11/16" | 1' 9 21/32" | 1' 11 5/8" | 2' 1 19/32" | 2' 3 9/16" | 2' 5 17/32" |
| 7' 2 5/8" | 55 | 55 | 55 | 55 | 55 | 55 | 53 |
| 7' 0 21/32" | 55 | 55 | 55 | 55 | 55 | 55 | 51 |
| 6' 10 11/16" | 55 | 55 | 55 | 55 | 55 | 53 | 51 |
| 6' 8 23/32" | 55 | 55 | 55 | 55 | 55 | 53 | 49 |
| 6' 6 3/4" | 55 | 55 | 55 | 55 | 55 | 51 | 46 |
| 6' 4 25/32" | 55 | 55 | 55 | 55 | 53 | 49 | 46 |
| 6' 2 13/16" | 55 | 55 | 55 | 55 | 51 | 46 | 44 |
| 6' 0 27/32" | 55 | 55 | 55 | 53 | 49 | 46 | 42 |
| 5' 10 7/8" | 55 | 55 | 55 | 51 | 46 | 44 | 42 |
| 5' 8 29/32" | 55 | 55 | 55 | 49 | 46 | 42 | 40 |
| 5' 6 15/16" | 55 | 55 | 53 | 49 | 44 | 42 | 37 |
| 5' 4 31/32" | 55 | 55 | 51 | 46 | 42 | 40 | 37 |
| 5' 3" | 55 | 53 | 49 | 44 | 40 | 37 | 35 |
| 5' 1 1/32" | 55 | 51 | 46 | 42 | 40 | 35 | 33 |
| 4' 11 11/16" | 53 | 49 | 44 | 40 | 37 | 35 | 33 |
| 4' 9 3/32" | 51 | 46 | 42 | 37 | 35 | 33 | 31 |
| 4' 7 1/8" | 49 | 44 | 40 | 37 | 33 | 31 | 29 |
| 4' 5 5/32" | 46 | 42 | 37 | 35 | 33 | 31 | 29 |
| 4' 3 3/16" | 44 | 40 | 35 | 33 | 31 | 29 | 26 |
| 4' 1 7/32" | 42 | 37 | 33 | 31 | 29 | 26 | 24 |
| 3' 11 1/4" | 40 | 35 | 33 | 29 | 26 | 24 | 24 |

DE Türgewicht in kg / FR Poids de porte en kg / EN Door weight in kg / IT Peso ante in kg / ES Peso de puerta en kg

DE Maximale Gewicht in lbs. / FR Poids maximal en lbs. / EN Maximum weights in lbs. / IT Pesi massimo in lbs. / ES Pesos máximos en lbs.




Hawa Configurator

www.hawa.com/configurator →

List of individual parts, which are included in the sets:





Set for 1 pivot /slide-in door up to 25 kg (55 lbs.)

| | No. |
|-------------------------------------------------------------------------------------------|-------|
| Hawa Concepta III 25, basic set left, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8") | 30994 |
| Hawa Concepta III 25, basic set right, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8") | 30995 |


| | 30994 | 30995 | No. |
|-------------------------------------------------------------------------------------|-------|-------|-------|
| Set consisting of: | | | |
|  | 3 | 3 | 30686 |
|  | 1 | 1 | 30738 |
|  | 3 | 3 | 31070 |
|  | 1 | 1 | 30811 |
|  | 2 | 2 | 30983 |
|  | 1 | 1 | 30986 |
|  | 1 | | 30805 |
|  | 1 | | 31059 |
|  | 1 | 1 | 30810 |
|  | 1 | 1 | 31047 |
|  | 1 | | 30806 |
|  | 1 | | 31060 |

Suitable slide-in set

| | No. |
|---------------------------------------------------|-------|
| Hawa Concepta III 25/35, Push slide-in set, left | 30998 |
| Hawa Concepta III 25/35, Push slide-in set, right | 30999 |

| | 30998 | 30999 | No. |
|-------------------------------------------------------------------------------------|-------|-------|-------|
| Set consisting of: | | | |
|  | 1 | | 31038 |
|  | 1 | 1 | 31043 |
|  | 1 | 1 | 31010 |
|  | 1 | 1 | 30838 |
|  | 1 | | 30818 |
|  | | 1 | 31039 |
|  | | 1 | 30827 |

Cabinet connecting parts

| | | mm (inch) | No. |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|----------------------|-------|
|  | Connector set 55 mm (2 5/32"), for exterior connection to cabinet | 560 (1' 10 1/16") | 31005 |
|  | Connector top 55 mm (2 5/32"), for exterior connection to cabinet | 560 (1' 10 1/16") | 31430 |
|  | Connector top 110 mm (4 11/32"), for two pivot/slide-in doors | 500 (1' 7 11/16") | 31006 |
|  | Connector bottom 110 mm (4 11/32"), for two pivot/slide-in doors | 500 (1' 7 11/16") | 31246 |
|  | Connector bottom 110 mm (4 11/32"), for two pivot/slide-in doors (for installation in front of fixed plinth) | 26 (1 1/32") | 31007 |

Guides

| | | No. |
|-------------------------------------------------------------------------------------|---------------------------------------------------|-------|
|  | Guide for two inset pivot sliding doors, aluminum | 25680 |


Accessories

| | | No. |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|-------|
|  | Support for Halemeier automatic shut-off device Matching push button item 36 979 01 for Halemeier automatic shut-off device (Safety Box) | 31020 |


Straightening fitting

→ Details under accessories from page 265



Aluminum raw

| | No. |
|------------------------------------------------------------------------------------|--------------|
|  | 056.3192.079 |
|  | 056.3192.073 |


Aluminum anodized

| | Nr. |
|-----------------------------------------------------------------------------------|--------------|
|  | 056.3192.080 |

Aluminum black anodized




| | No. |
|--------------------------------------------------------------------------------------|--------------|
|  | 056.3192.081 |
|  | 056.3192.076 |

Straightening fitting


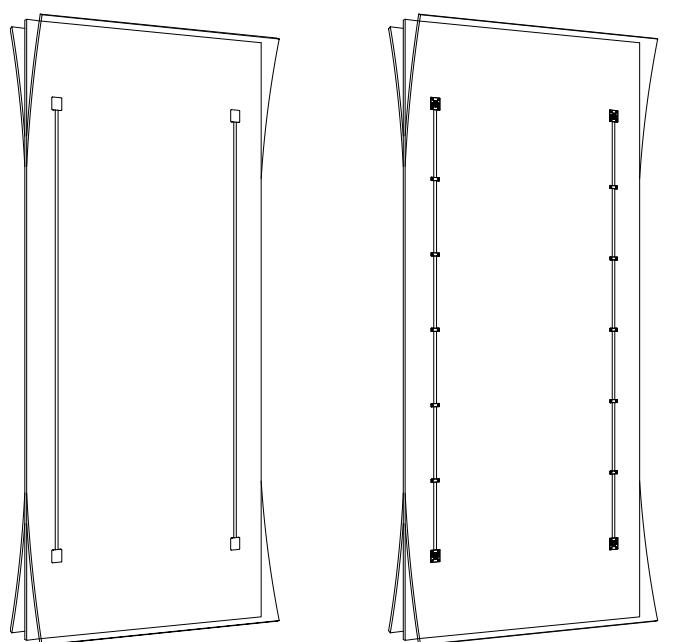


Further installation examples


Composed cabinet

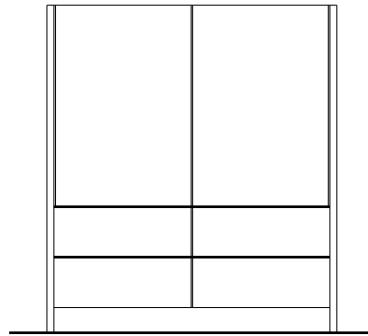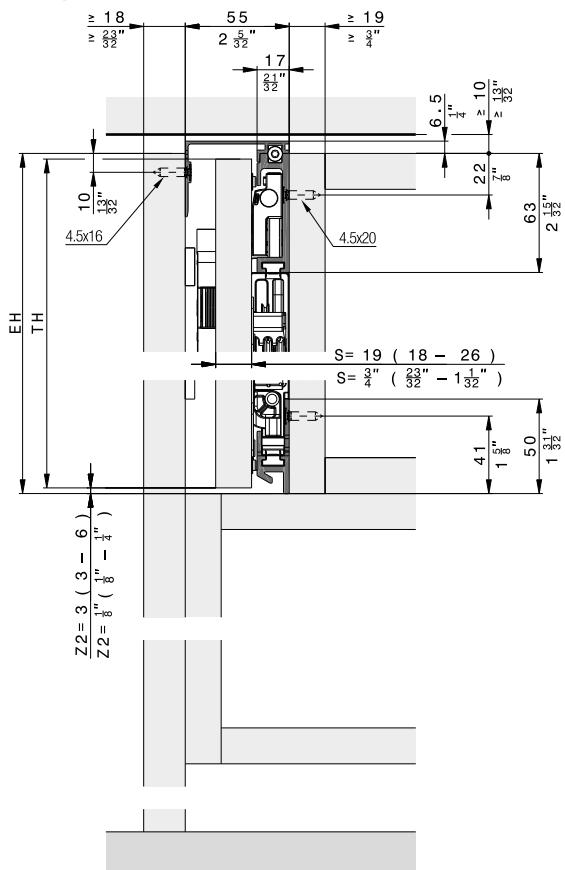

Cabinet without base panel

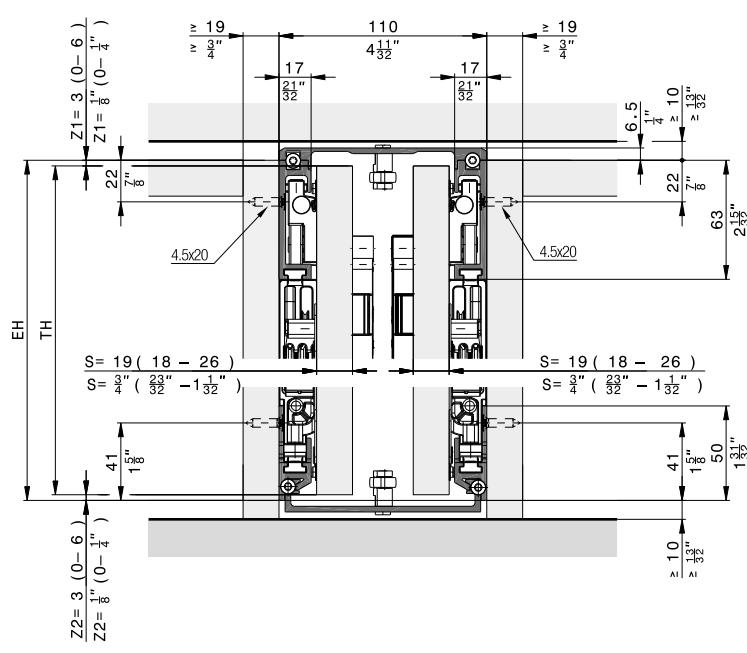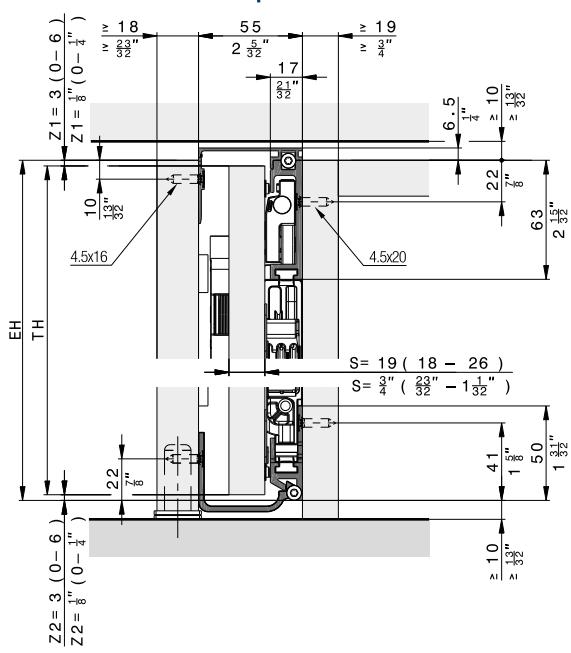


Inlaid doors

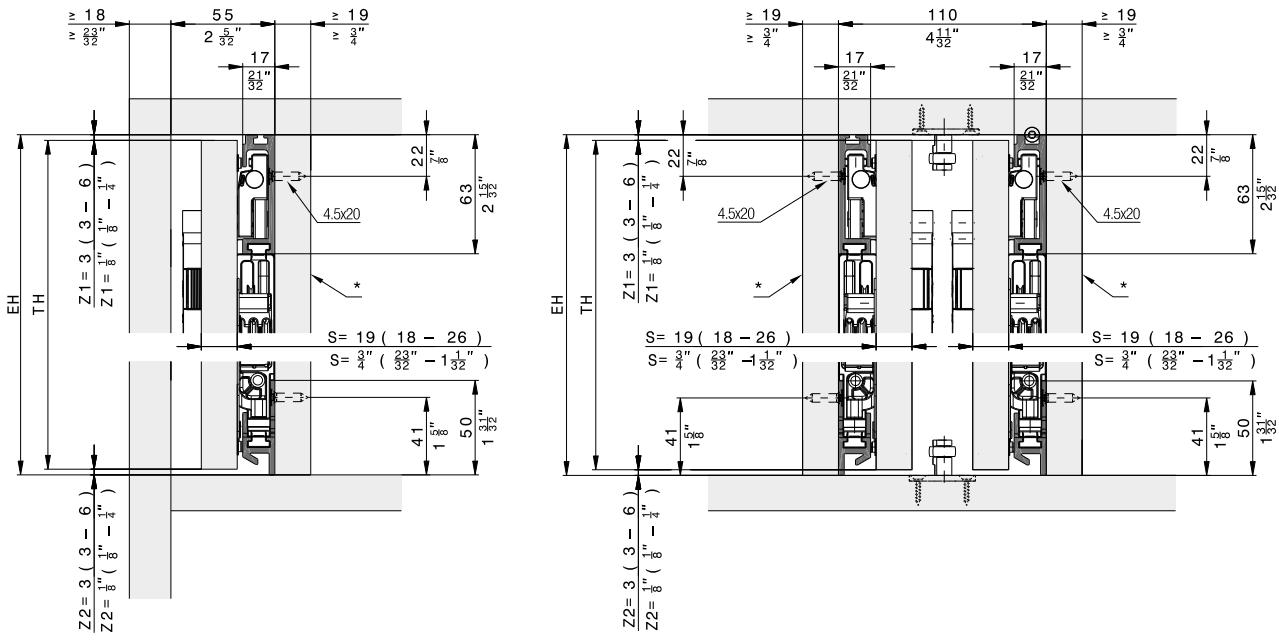


* removable

Floor-to-ceiling doors

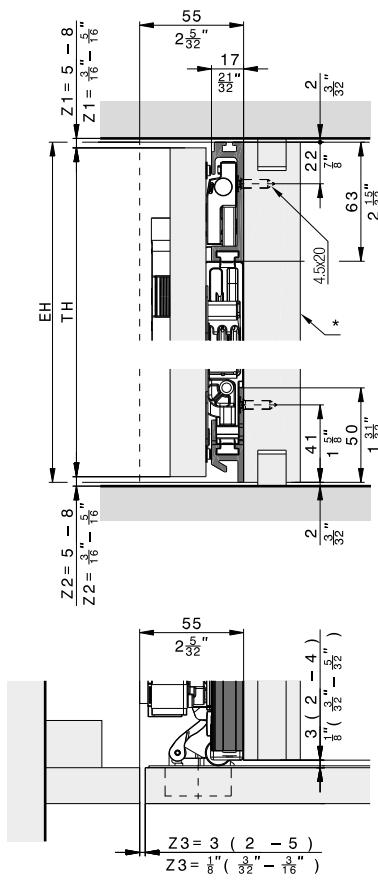


* removable

Hardware depth calculation

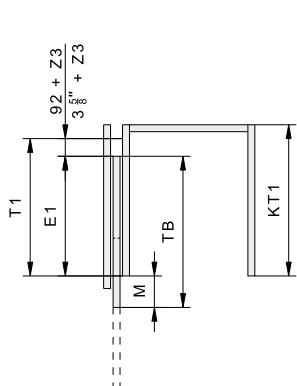


| | mm | Inch |
|----|------------|---------------------------|
| T1 | ≥ 414 | $\geq 1' 4\frac{5}{16}''$ |

Door flush with outer face



Protruding door



| | mm | Inch |
|----|-----------------------------|-----------------------------------------------------------|
| T1 | $TB + 92 + Z3 - M$ | $TB + 3\frac{5}{8}'' + Z3 - M$ |
| E1 | $TB - M$ | $TB - M$ |
| M | $\geq S+3$ $\leq TB-320$ | $\geq S + \frac{5}{16}''$ $\leq TB - 1\frac{19}{32}''$ |

Instructions

- [Installation →](#)
- [Adjustment →](#)
- [Connector →](#)

Videos

- [Installation →](#)
- [Adjustment →](#)
- [Connector →](#)

Accessories

– Straightening fitting from page 265

Planning/execution

Configure with just a few clicks at www.hawa.com/configurator

Further information about the product can be found
on www.hawa.com.


Hardware for pivoting and lateral sliding in of wooden doors up to 25 kg (55 lbs.). Uniform, flush front design with even gap pattern. Pull version with handle and integrated soft closing mechanism.

Product highlights

-  **Productivity** Easy installation thanks to high degree of pre-assembly with intuitive adjustment
-  **Comfort** Ergonomic movement support for even, smooth movement
-  **Aesthetics** Allows constructions with and without handle – the technology remains invisible



Technical specifications

| | |
|------------------------------------------------------------------------------------|----------------------------------------|
|  | 6–25 kg (13 to 55 lbs.) |
|  | 1200–2200 mm (3' 11 1/4" to 7' 2 5/8") |
|  | 440–750 mm (1' 5 5/16" to 2' 5 17/32") |
|  | 18–26 mm (23/32" to 1 1/32") |


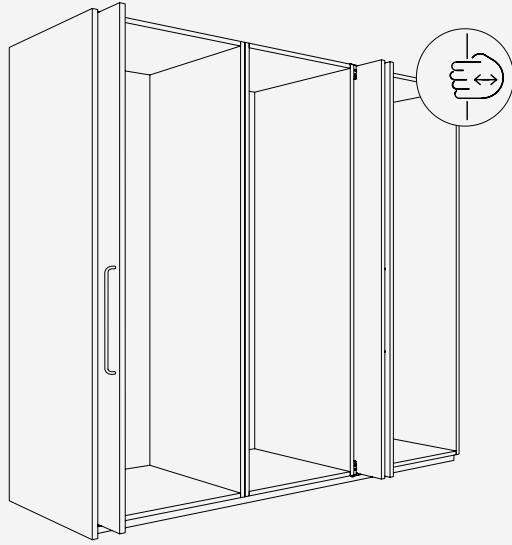


Installation examples

Door striking against the top and bottom cabinet sections

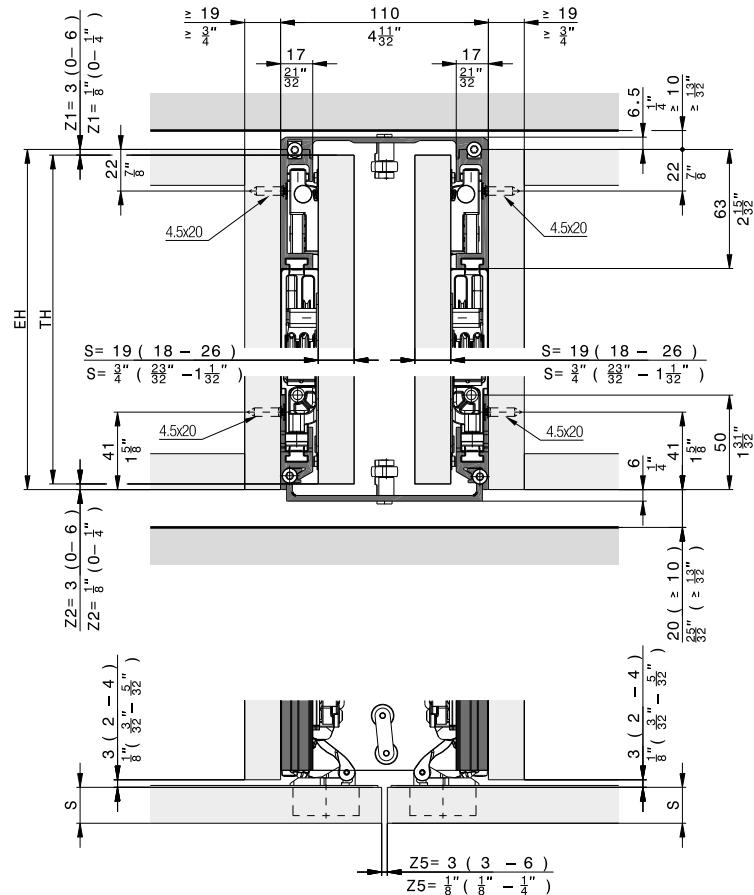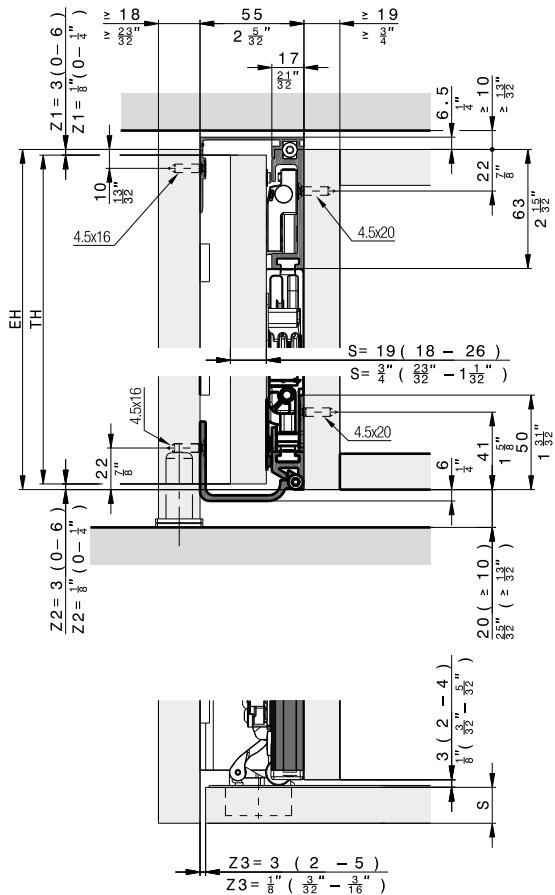

Components required for one cabinet



Hawa Concepta III 25 Pull, left

| | No. |
|----------------------------------------------------------------------------------------------------------------------|-------|
| Hawa Concepta III 25, basic set left, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8") | 30994 |
| Hawa Concepta III 25/35, Pull slide-in set, left | 31000 |
| Upright profile L= 1974 mm (6' 5 23/32"), for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized | 30778 |

Hawa Concepta III 25 Pull, right

| | No. |
|----------------------------------------------------------------------------------------------------------------------|-------|
| Hawa Concepta III 25, basic set right, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8") | 30995 |
| Hawa Concepta III 25/35, Pull slide-in set, right | 31001 |
| Upright profile L= 1974 mm (6' 5 23/32"), for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized | 30778 |

Weight and door size ratio calculations

The maximum weight must be adapted depending on the door size ratio.

| DE Türhöhe / FR Hauteur de porte / EN Door height / IT Altezza ante / ES Altura ante / | Maximale Gewicht in kg / FR Poids maximale en kg / EN Maximum weights in kg / IT Pesi massimo in kg / ES Pesos máximos en kg | | | | | | |
|----------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|-----|-----|-----|-----|-----|-----|
| | 440 | 500 | 550 | 600 | 650 | 700 | 750 |
| 2200 | 25 | 25 | 25 | 25 | 25 | 25 | 24 |
| 2150 | 25 | 25 | 25 | 25 | 25 | 25 | 23 |
| 2100 | 25 | 25 | 25 | 25 | 25 | 24 | 23 |
| 2050 | 25 | 25 | 25 | 25 | 25 | 24 | 22 |
| 2000 | 25 | 25 | 25 | 25 | 25 | 23 | 21 |
| 1950 | 25 | 25 | 25 | 25 | 24 | 22 | 21 |
| 1900 | 25 | 25 | 25 | 25 | 23 | 21 | 20 |
| 1850 | 25 | 25 | 25 | 24 | 22 | 21 | 19 |
| 1800 | 25 | 25 | 25 | 23 | 21 | 20 | 19 |
| 1750 | 25 | 25 | 25 | 22 | 21 | 19 | 18 |
| 1700 | 25 | 25 | 24 | 22 | 20 | 19 | 17 |
| 1650 | 25 | 25 | 23 | 21 | 19 | 18 | 17 |
| 1600 | 25 | 24 | 22 | 20 | 18 | 17 | 16 |
| 1550 | 25 | 23 | 21 | 19 | 18 | 16 | 15 |
| 1500 | 24 | 22 | 20 | 18 | 17 | 16 | 15 |
| 1450 | 23 | 21 | 19 | 17 | 16 | 15 | 14 |
| 1400 | 22 | 20 | 18 | 17 | 15 | 14 | 13 |
| 1350 | 21 | 19 | 17 | 16 | 15 | 14 | 13 |
| 1300 | 20 | 18 | 16 | 15 | 14 | 13 | 12 |
| 1250 | 19 | 17 | 15 | 14 | 13 | 12 | 11 |
| 1200 | 18 | 16 | 15 | 13 | 12 | 11 | 11 |

| DE Türgewicht in kg / FR Poids de porte en kg / EN Door weight in kg / IT Peso ante in kg / ES Peso de puerta en kg | Maximale Gewicht in lbs / FR Poids maximale en lbs / EN Maximum weights in lbs / IT Pesi massimo in lbs / ES Pesos máximos en lbs | | | | | | |
|---------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|-------------|-------------|------------|-------------|------------|-------------|
| | 1' 5 5/16" | 1' 7 11/16" | 1' 9 21/32" | 1' 11 5/8" | 2' 1 19/32" | 2' 3 9/16" | 2' 5 17/32" |
| 7' 2 5/8" | 55 | 55 | 55 | 55 | 55 | 55 | 53 |
| 7' 0 21/32" | 55 | 55 | 55 | 55 | 55 | 55 | 51 |
| 6' 10 11/16" | 55 | 55 | 55 | 55 | 55 | 53 | 51 |
| 6' 8 23/32" | 55 | 55 | 55 | 55 | 55 | 53 | 49 |
| 6' 6 3/4" | 55 | 55 | 55 | 55 | 55 | 51 | 46 |
| 6' 4 25/32" | 55 | 55 | 55 | 55 | 53 | 49 | 46 |
| 6' 2 13/16" | 55 | 55 | 55 | 55 | 51 | 46 | 44 |
| 6' 0 27/32" | 55 | 55 | 55 | 53 | 49 | 46 | 42 |
| 5' 10 7/8" | 55 | 55 | 55 | 51 | 46 | 44 | 42 |
| 5' 8 29/32" | 55 | 55 | 55 | 49 | 46 | 42 | 40 |
| 5' 6 15/16" | 55 | 55 | 53 | 49 | 44 | 42 | 37 |
| 5' 4 31/32" | 55 | 55 | 51 | 46 | 42 | 40 | 37 |
| 5' 3" | 55 | 53 | 49 | 44 | 40 | 37 | 35 |
| 5' 1 1/32" | 55 | 51 | 46 | 42 | 40 | 35 | 33 |
| 4' 11 11/16" | 53 | 49 | 44 | 40 | 37 | 35 | 33 |
| 4' 9 3/32" | 51 | 46 | 42 | 37 | 35 | 33 | 31 |
| 4' 7 1/8" | 49 | 44 | 40 | 37 | 33 | 31 | 29 |
| 4' 5 5/32" | 46 | 42 | 37 | 35 | 33 | 31 | 29 |
| 4' 3 3/16" | 44 | 40 | 35 | 33 | 31 | 29 | 26 |
| 4' 1 7/32" | 42 | 37 | 33 | 31 | 29 | 26 | 24 |
| 3' 11 1/4" | 40 | 35 | 33 | 29 | 26 | 24 | 24 |




Hawa Configurator

www.hawa.com/configurator →

List of individual parts, which are included in the sets:

Set for 1 pivot /slide-in door up to 25 kg (55 lbs.)





| | No. |
|-------------------------------------------------------------------------------------------|-------|
| Hawa Concepta III 25, basic set left, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8") | 30994 |
| Hawa Concepta III 25, basic set right, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8") | 30995 |

| Set consisting of: | 30994 | 30995 | No. |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|-------|-------|
|  | Slot nuts for hinge attachment, plastic, black | 3 | 30686 |
|  | Mounting plate for hinge with height adjustment, steel, nickel-plated | 1 | 30738 |
|  | Concealed hinge, with soft closing mechanism and closing spring, steel, nickel plated | 3 | 31070 |
|  | Set for concealed hinges, 8 screws 4x16 mm (5/32"x5/8"), 3 door stop buffers | 1 | 30811 |
|  | Profile for magnetic guide, with double-sided adhesive tape, steel, black, L=730 mm (2' 4 3/4") | 2 | 30983 |
|  | Euro screw, 6x13 mm (1/4"x1/2"), steel, black, set of 6 pieces | 1 | 30986 |
|  | Bottom guide track left, aluminum, anodized, L= 838 mm (2' 9") | 1 | 30805 |
|  | Top running track left, aluminum, anodized, L= 838 mm (2' 9") | 1 | 31059 |
|  | Countersunk head screw, 4.5x20 mm (5/32"x25/32"), steel, zinc-plated, set of 16 pieces | 1 | 30810 |
|  | Set of adjusting tools | 1 | 31047 |
|  | Bottom guide track right, aluminum, anodized, L= 838 mm (2' 9") | 1 | 30806 |
|  | Top running track right, aluminum, anodized, L= 838 mm (2' 9") | 1 | 31060 |



Suitable slide-in set

| | No. |
|---------------------------------------------------|-------|
| Hawa Concepta III 25/35, Pull slide-in set, left | 31000 |
| Hawa Concepta III 25/35, Pull slide-in set, right | 31001 |
| | No. |
| 31000 | 31001 |
| | No. |

Set consisting of:

| | | | |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|---|-------|
|  | Hawa Concepta III 25/35 Pull slide-in unit, left | 1 | 31040 |
|  | End stop bracket Pull, steel zinc-plated | 1 | 31414 |
|  | Soft closing mechanism with end stop | 1 | 31221 |
|  | Hawa Concepta III Pull set of cover caps, for left-hand stop, plastic, black | 1 | 30964 |
|  | Hawa Concepta III 25/35 Pull slide-in unit, right | 1 | 31041 |
|  | Hawa Concepta III Pull set of cover caps, for right-hand stop, plastic, black | 1 | 30965 |

Cabinet connecting parts

| | | mm (inch) | No. |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|----------------------|-------|
|  | Connector set 55 mm (2 5/32"), for exterior connection to cabinet | 560 (1' 10 1/16") | 31005 |
|  | Connector top 55 mm (2 5/32"), for exterior connection to cabinet | 560 (1' 10 1/16") | 31430 |
|  | Connector top 110 mm (4 11/32"), for two pivot/slide-in doors | 500 (1' 7 11/16") | 31006 |
|  | Connector bottom 110 mm (4 11/32"), for two pivot/slide-in doors | 500 (1' 7 11/16") | 31246 |
|  | Connector bottom 110 mm (4 11/32"), for two pivot/slide-in doors (for installation in front of fixed plinth) | 26 (1 1/32") | 31007 |

Guides

| | | No. |
|-------------------------------------------------------------------------------------|---------------------------------------------------|-------|
|  | Guide for two inset pivot sliding doors, aluminum | 25680 |



Accessories

| | | No. |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|-------|
|  | Support for Halemeier automatic shut-off device Matching push button item 36 979 01 for Halemeier automatic shut-off device (Safety Box) | 31020 |

Straightening fitting

→ Details under accessories from page 265



Aluminum raw

| | No. |
|------------------------------------------------------------------------------------|--------------|
|  | 056.3192.079 |
|  | 056.3192.073 |



Aluminum anodized

| | Nr. |
|-----------------------------------------------------------------------------------|--------------|
|  | 056.3192.080 |

Aluminum black anodized




| | No. |
|--------------------------------------------------------------------------------------|--------------|
|  | 056.3192.081 |
|  | 056.3192.076 |

Straightening fitting

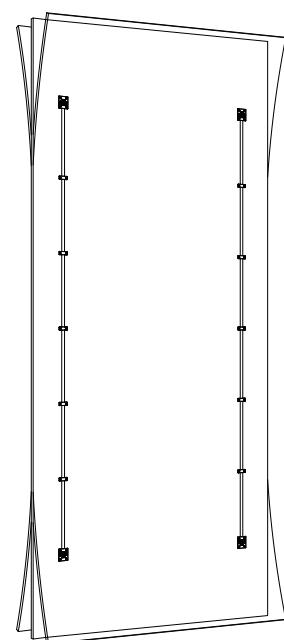
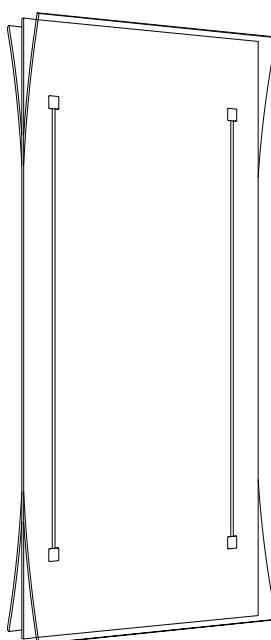


Further installation examples


Composed cabinet

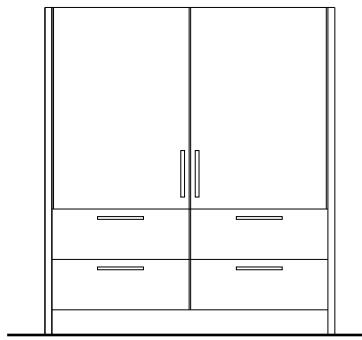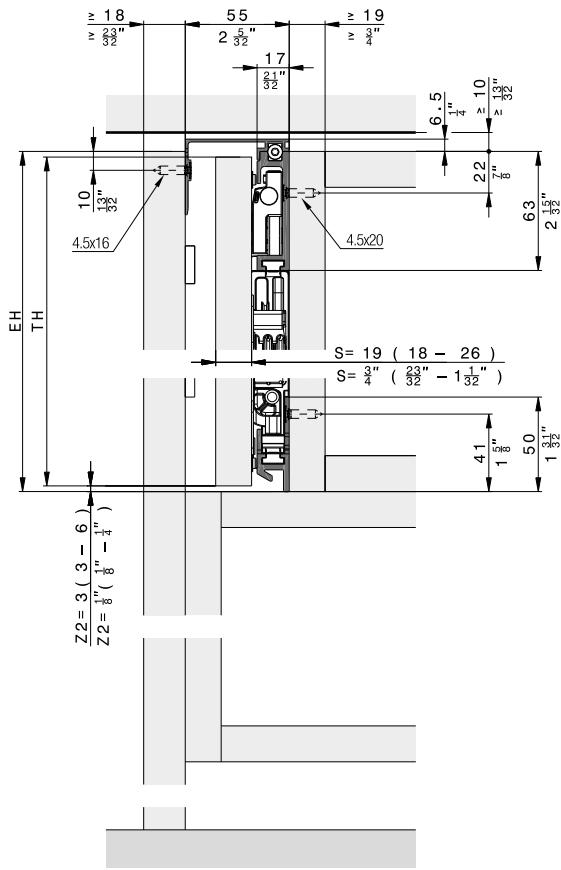

Cabinet without base panel

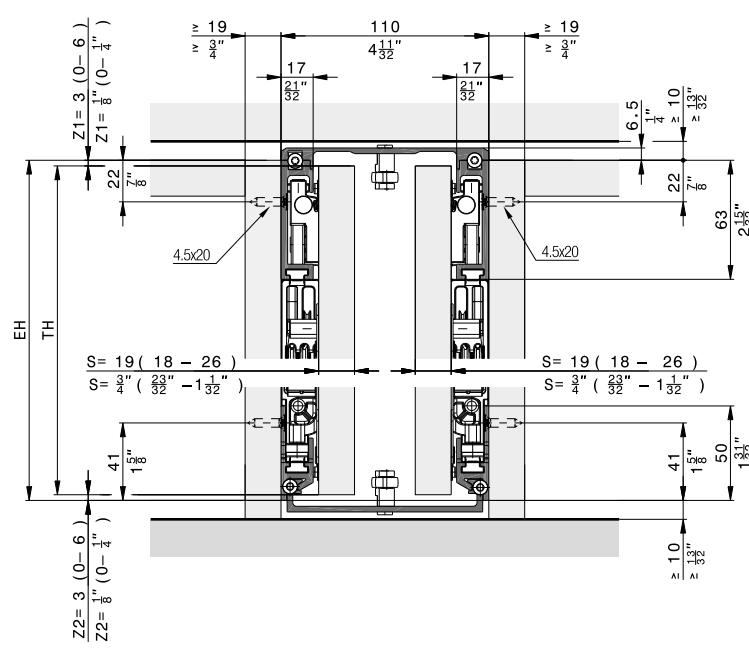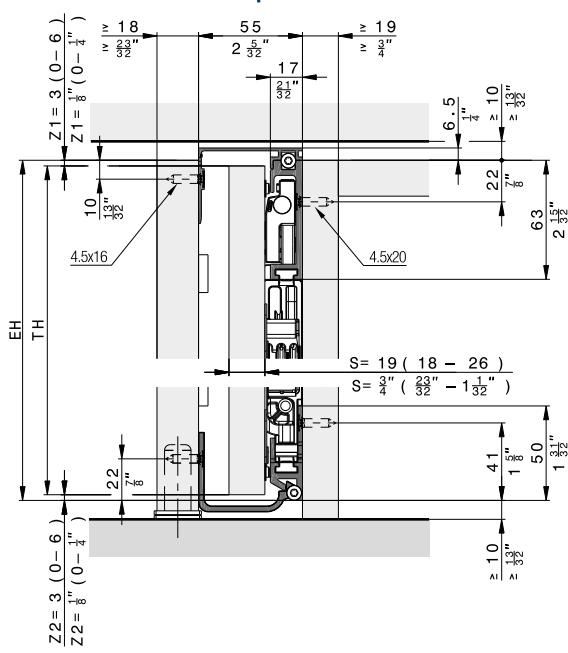


Inlaid doors

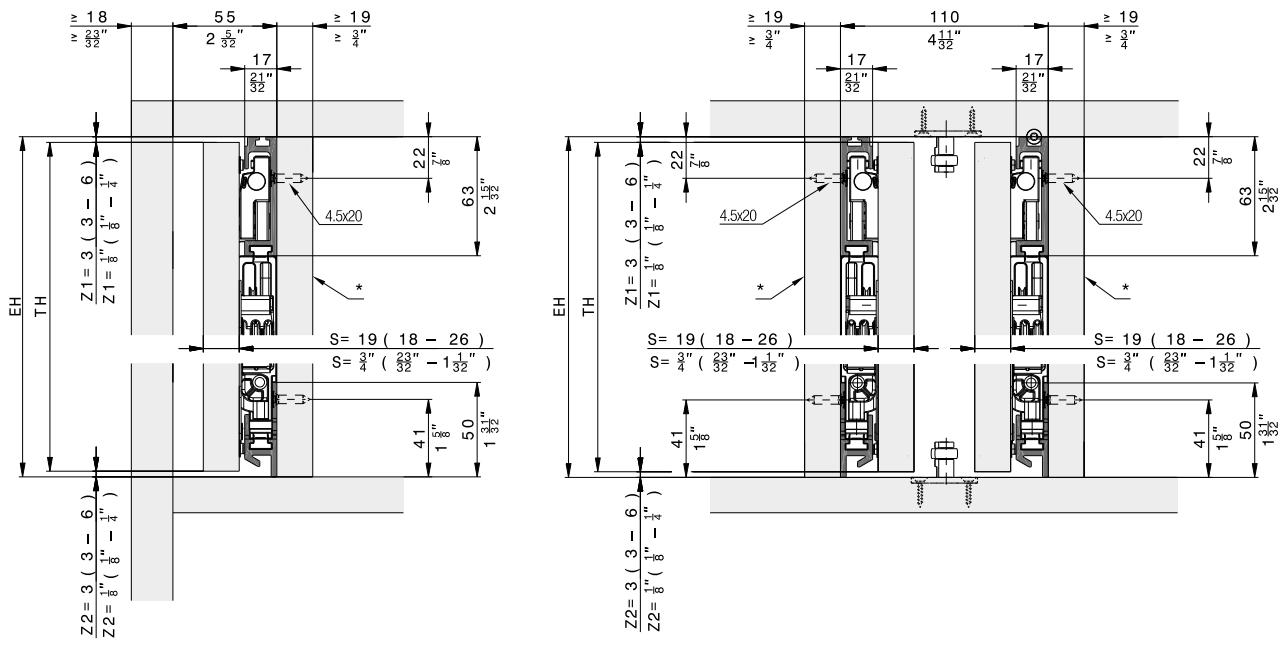


* removable

Floor-to-ceiling doors

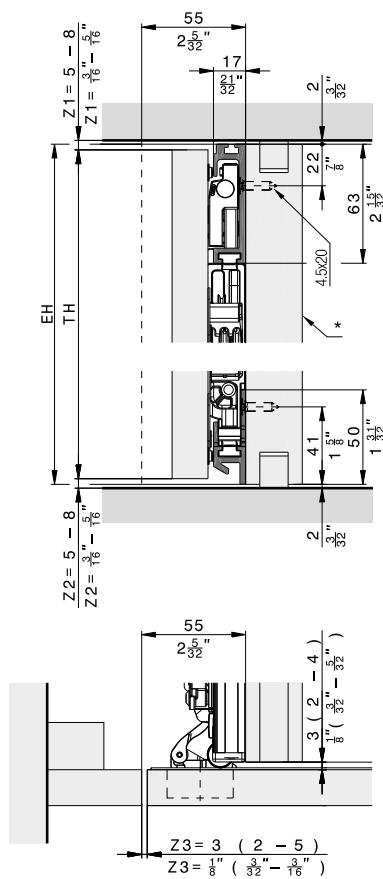

* removable


Hardware depth calculation

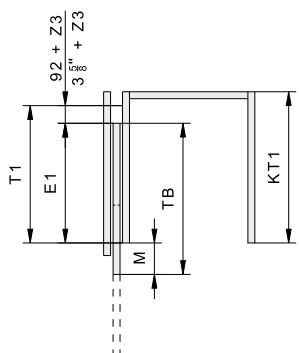


| | mm | Inch |
|----|------------|---------------------------|
| T1 | ≥ 414 | $\geq 1' 4\frac{5}{16}''$ |

| | mm | Inch |
|----|---------------------------------|-----------------------------------------------------------|
| T1 | $TB + 92 + Z3 - M$ | $TB + 3\frac{5}{8}'' + Z3 - M$ |
| E1 | $TB - M$ | $TB - M$ |
| M | $\geq S + 3$ $\leq TB - 320$ | $\geq S + \frac{5}{16}''$ $\leq TB - 1\frac{19}{32}''$ |

Door flush with outer face



Protruding door

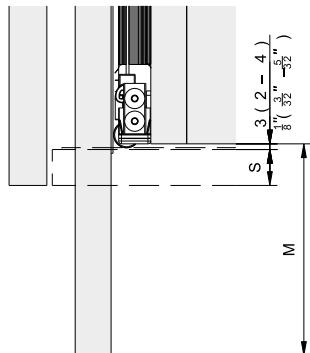

Instructions

- Installation** →
- Adjustment** →
- Connector** →

Videos

- Installation** →
- Adjustment** →
- Connector** →

Accessories

– Straightening fitting from page 265

Planning/execution

Configure with just a few clicks at www.hawa.com/configurator

Further information about the product can be found on www.hawa.com.


**Fitting for pivoting and lateral sliding in of wooden doors up to 35 kg (77 lbs.).
Uniform, flush front design with even gap pattern. Push-to-open function for handle-less cabinet designs.**

Product highlights

-  **Productivity** Easy installation thanks to high degree of pre-assembly with intuitive adjustment
-  **Comfort** Ergonomic movement support for even, smooth movement
-  **Aesthetics** Cabinet designs without handle – the technology remains invisible



Technical specifications

| | |
|-------------------------------------------------------------------------------------|-------------------------------------------|
|  | 10–35 kg (22 to 77 lbs.) |
|  | 1900–2700 mm (6' 2 13/16" to 8' 10 5/16") |
|  | 440–750 mm (1' 5 5/16" to 2' 5 17/32") |
|  | 18–26 mm (23/32" to 1 1/32") |


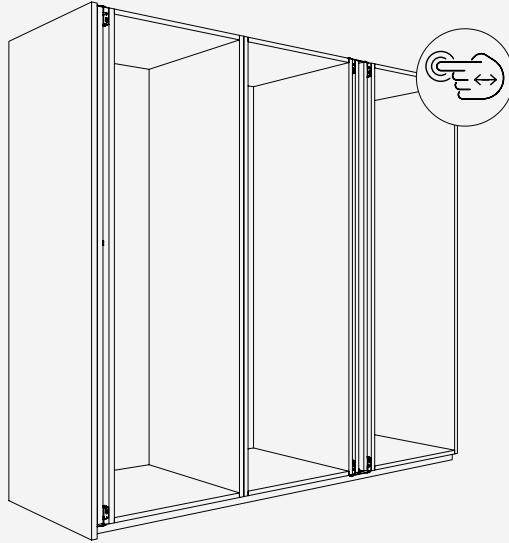


Installation examples

Door striking against the top and bottom cabinet sections

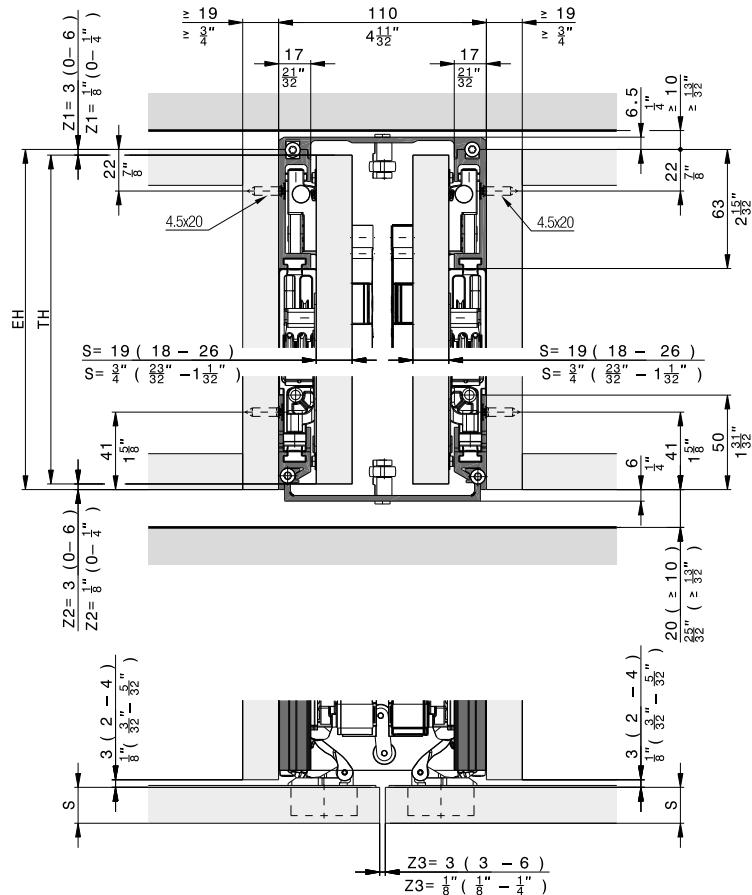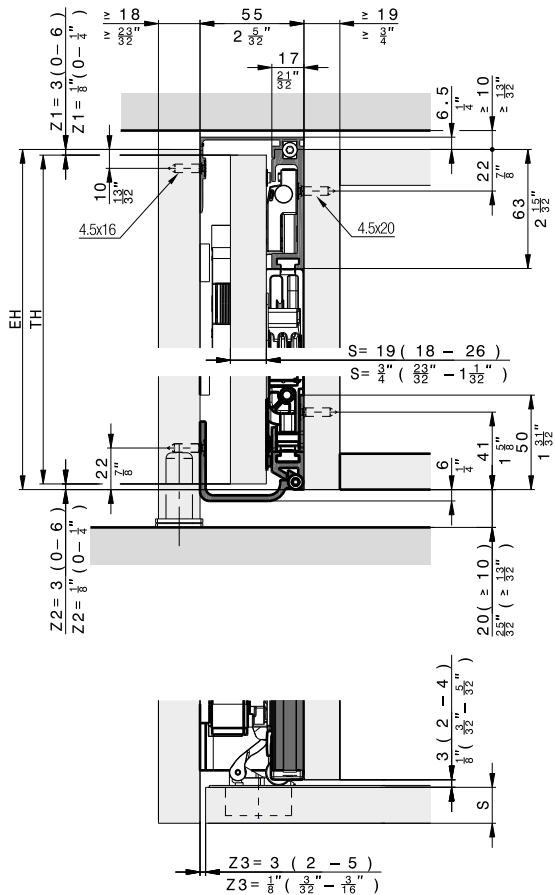

Components required for one cabinet



Hawa Concepta III 35 Push, left

| | No. |
|-------------------------------------------------------------------------------------------------------------------------|-------|
| Hawa Concepta III 35, basic set left, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16") | 30996 |
| Hawa Concepta III 25/35, Push slide-in set, left | 30998 |
| Upright profile L= 2474 mm (8' 1 13/32"), for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized | 30771 |

Hawa Concepta III 35 Push, right

| | No. |
|-------------------------------------------------------------------------------------------------------------------------|-------|
| Hawa Concepta III 35, basic set right, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16") | 30997 |
| Hawa Concepta III 25/35, Push slide-in set, right | 30999 |
| Upright profile L= 2474 mm (8' 1 13/32"), for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized | 30771 |

Weight and door size ratio calculations

The maximum weight must be adapted depending on the door size ratio.

DE Türbreite / FR Largeur de porte / EN Door width / IT Larghezza anta / ES Ancho de puerta

DE Türhöhe / FR Hauteur de porte / EN Door height / IT Altura ante / ES Altura de puerta

| | 440 | 500 | 550 | 600 | 650 | 700 | 750 |
|------|-----|-----|-----|-----|-----|-----|-----|
| 2700 | 35 | 35 | 35 | 35 | 35 | 35 | 35 |
| 2650 | 35 | 35 | 35 | 35 | 35 | 35 | 35 |
| 2600 | 35 | 35 | 35 | 35 | 35 | 35 | 35 |
| 2550 | 35 | 35 | 35 | 35 | 35 | 35 | 35 |
| 2500 | 35 | 35 | 35 | 35 | 35 | 35 | 35 |
| 2450 | 35 | 35 | 35 | 35 | 35 | 35 | 34 |
| 2400 | 35 | 35 | 35 | 35 | 35 | 35 | 33 |
| 2350 | 35 | 35 | 35 | 35 | 35 | 34 | 32 |
| 2300 | 35 | 35 | 35 | 35 | 35 | 34 | 31 |
| 2250 | 35 | 35 | 35 | 35 | 35 | 33 | 31 |
| 2200 | 35 | 35 | 35 | 35 | 34 | 32 | 30 |
| 2150 | 35 | 35 | 35 | 35 | 33 | 31 | 29 |
| 2100 | 35 | 35 | 35 | 35 | 32 | 30 | 28 |
| 2050 | 35 | 35 | 35 | 34 | 31 | 29 | 27 |
| 2000 | 35 | 35 | 35 | 33 | 30 | 28 | 26 |
| 1950 | 35 | 35 | 35 | 32 | 29 | 27 | 26 |
| 1900 | 35 | 35 | 34 | 31 | 29 | 27 | 25 |

DE Maximale Gewichte in kg / FR Poids maximum en kg / EN Maximum weights in kg / IT Pesi massimo in kg / ES Pesos máximos en kg

| | 1' 5 5/16" | 1' 7 11/16" | 1' 9 21/32" | 1' 11 5/8" | 2' 1 19/32" | 2' 3 9/16" | 2' 5 17/32" |
|--------------|------------|-------------|-------------|------------|-------------|------------|-------------|
| 8' 10 5/16" | 77 | 77 | 77 | 77 | 77 | 77 | 77 |
| 8' 8 11/32" | 77 | 77 | 77 | 77 | 77 | 77 | 77 |
| 8' 6 3/8" | 77 | 77 | 77 | 77 | 77 | 77 | 77 |
| 8' 4 13/32" | 77 | 77 | 77 | 77 | 77 | 77 | 77 |
| 8' 2 7/16" | 77 | 77 | 77 | 77 | 77 | 77 | 77 |
| 8' 0 15/32" | 77 | 77 | 77 | 77 | 77 | 77 | 75 |
| 7' 10 1/2" | 77 | 77 | 77 | 77 | 77 | 77 | 73 |
| 7' 8 17/32" | 77 | 77 | 77 | 77 | 77 | 75 | 71 |
| 7' 6 9/16" | 77 | 77 | 77 | 77 | 77 | 75 | 68 |
| 7' 4 19/32" | 77 | 77 | 77 | 77 | 77 | 73 | 68 |
| 7' 2 5/8" | 77 | 77 | 77 | 77 | 75 | 71 | 66 |
| 7' 0 21/32" | 77 | 77 | 77 | 77 | 73 | 68 | 64 |
| 6' 10 11/16" | 77 | 77 | 77 | 77 | 71 | 66 | 62 |
| 6' 8 23/32" | 77 | 77 | 77 | 75 | 68 | 64 | 60 |
| 6' 6 3/4" | 77 | 77 | 77 | 73 | 66 | 62 | 57 |
| 6' 4 25/32" | 77 | 77 | 77 | 71 | 64 | 60 | 57 |
| 6' 2 13/16" | 77 | 77 | 75 | 68 | 64 | 60 | 55 |

DE Türgewicht in kg / FR Poids de porte en kg / EN Door weight in kg / IT Peso ante in kg / ES Peso de puerta en kg

DE Maximale Gewichte in lbs. / FR Poids maximum en lbs. / EN Maximum weights in lbs. / IT Pesi massimo in lbs. / ES Pesos máximos en lbs.

Hawa Configurator






www.hawa.com/configurator



List of individual parts, which are included in the sets:







Set for 1 pivot /slide-in door up to 35 kg (77 lbs.)

| | No. |
|----------------------------------------------------------------------------------------------|-------|
| Hawa Concepta III 35, basic set left, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16") | 30996 |
| Hawa Concepta III 35, basic set right, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16") | 30997 |


| Set consisting of: | 30996 | 30997 | No. |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|-------|-------|
|  | Slot nuts for hinge attachment, plastic, black | 4 | 30686 |
|  | Mounting plate for hinge with height adjustment, steel, nickel-plated | 1 | 30738 |
|  | Concealed hinge, with soft closing mechanism and closing spring, steel, nickel plated | 4 | 31070 |
|  | Set for concealed hinges, 8 screws 4x16 mm (5/32"x5/8"), 3 door stop buffers | 1 | 30811 |
|  | Profile for magnetic guide, with double-sided adhesive tape, steel, black, L=730 mm (2' 4 3/4") | 2 | 30983 |
|  | Euro screw, 6x13 mm (1/4"x1 1/2"), steel, black, set of 6 pieces | 1 | 30986 |
|  | Bottom guide track left, aluminum, anodized, L= 838 mm (2' 9") | 1 | 30805 |
|  | Top running track left, aluminum, anodized, L= 838 mm (2' 9") | 1 | 31059 |
|  | Countersunk head screw, 4.5x20 mm (5/32"x25/32"), steel, zinc-plated, set of 16 pieces | 1 | 30810 |
|  | Set of adjusting tools | 1 | 31047 |
|  | Bottom guide track right, aluminum, anodized, L= 838 mm (2' 9") | 1 | 30806 |
|  | Top running track right, aluminum, anodized, L= 838 mm (2' 9") | 1 | 31060 |

Suitable slide-in set

| | No. |
|---------------------------------------------------|-------|
| Hawa Concepta III 25/35, Push slide-in set, left | 30998 |
| Hawa Concepta III 25/35, Push slide-in set, right | 30999 |

| | 30998 | 30999 | No. |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|-------|-------|
| Set consisting of: | | | |
|  | Hawa Concepta III 25/35 Push slide-in unit, left | 1 | 31038 |
|  | End stop bracket for push ejector, steel, zinc-plated | 1 | 31043 |
|  | Push ejector, plastic, black | 1 | 31010 |
|  | Push-to-open with adapter plate, plastic, black | 1 | 30838 |
|  | Hawa Concepta III Push set of cover caps, for left-hand stop, plastic, black | 1 | 30818 |
|  | Hawa Concepta III 25/35 Push slide-in unit, right | 1 | 31039 |
|  | Hawa Concepta III Push set of cover caps, for right-hand stop, plastic, black | 1 | 30827 |

Cabinet connecting parts

| | | mm (inch) | No. |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|----------------------|-------|
|  | Connector set 55 mm (2 5/32"), for exterior connection to cabinet | 560 (1' 10 1/16") | 31005 |
|  | Connector top 55 mm (2 5/32"), for exterior connection to cabinet | 560 (1' 10 1/16") | 31430 |
|  | Connector top 110 mm (4 11/32"), for two pivot/slide-in doors | 500 (1' 7 11/16") | 31006 |
|  | Connector bottom 110 mm (4 11/32"), for two pivot/slide-in doors | 500 (1' 7 11/16") | 31246 |
|  | Connector bottom 110 mm (4 11/32"), for two pivot/slide-in doors (for installation in front of fixed plinth) | 26 (1 1/32") | 31007 |

Guides

| | | No. |
|-------------------------------------------------------------------------------------|---------------------------------------------------|-------|
|  | Guide for two inset pivot sliding doors, aluminum | 25680 |

Accessories

| | | No. |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|-------|
|  | Support for Halemeier automatic shut-off device Matching push button item 36 979 01 for Halemeier automatic shut-off device (Safety Box) | 31020 |

Straightening fitting

→ Details under accessories from page 265

Aluminum raw

| | Nr. |
|-----------------------------------------------------------------------------------|--------------|
|  | 056.3192.072 |
|  | 056.3192.079 |



Aluminum anodized

| | No. |
|------------------------------------------------------------------------------------|--------------|
|  | 056.3192.071 |
|  | 056.3192.082 |
|  | 056.3192.080 |

Aluminum black anodized




| | No. |
|-------------------------------------------------------------------------------------|--------------|
|  | 056.3192.074 |
|  | 056.3192.075 |
|  | 056.3192.081 |

Straightening fitting

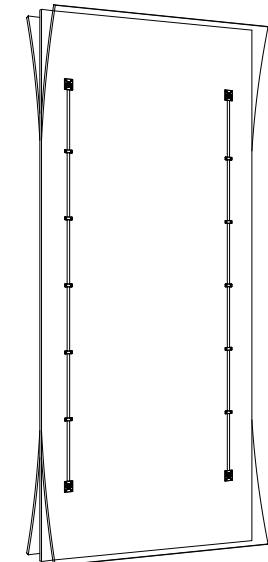
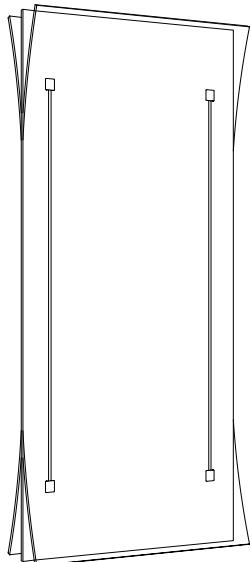


Further installation examples


Composed cabinet

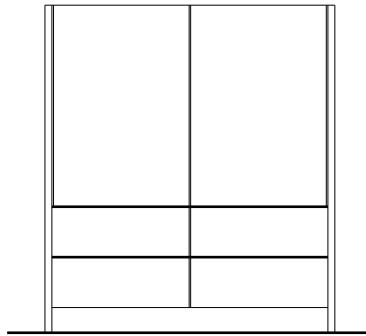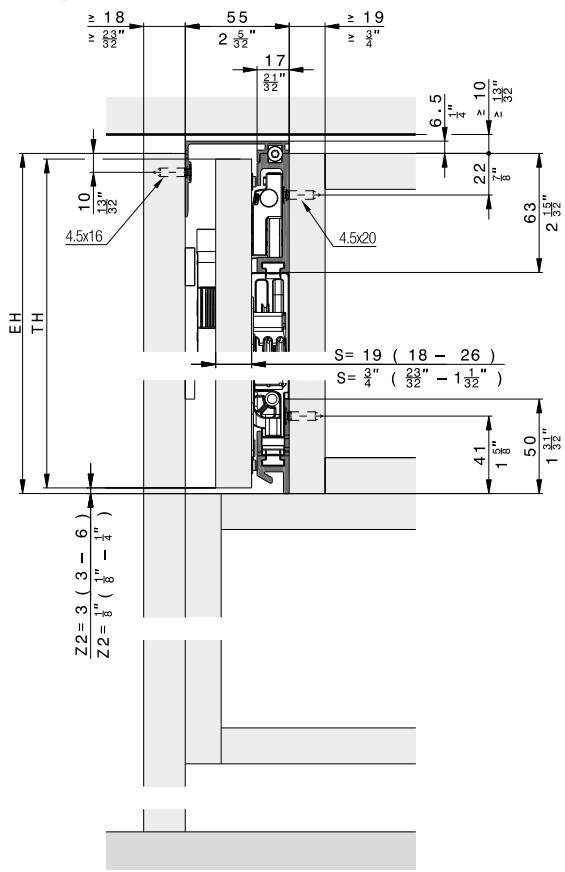

Cabinet without base panel

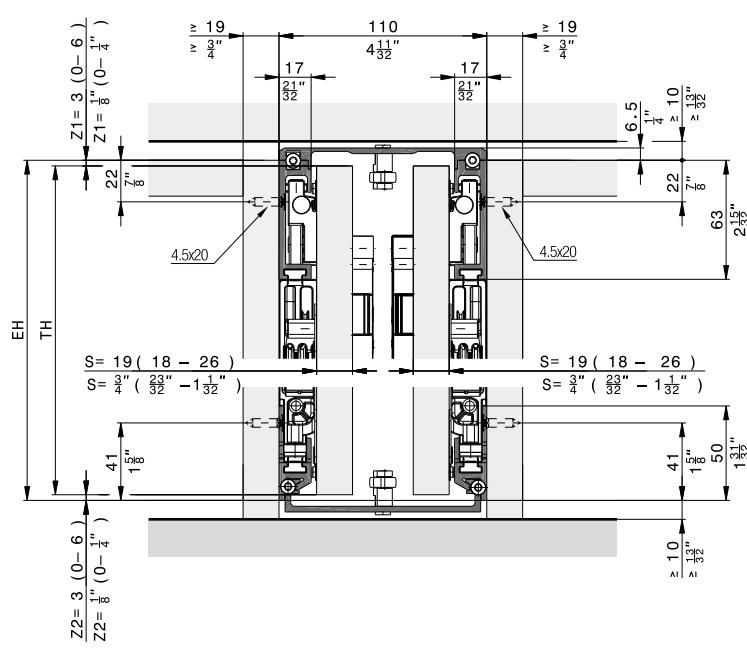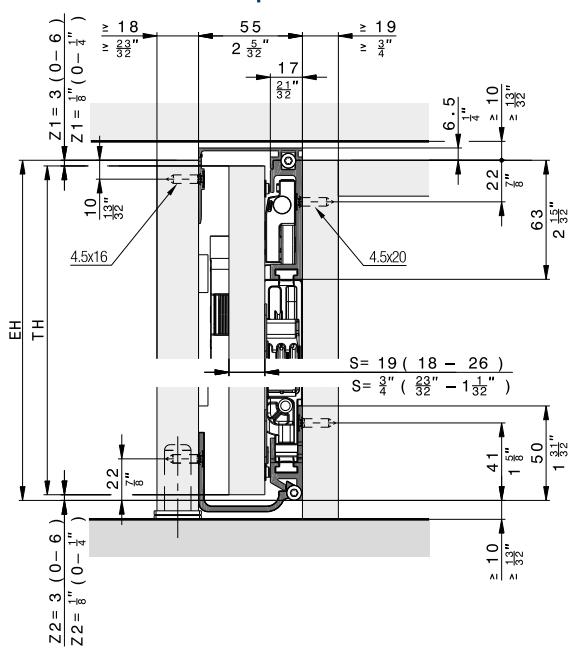


Inlaid doors

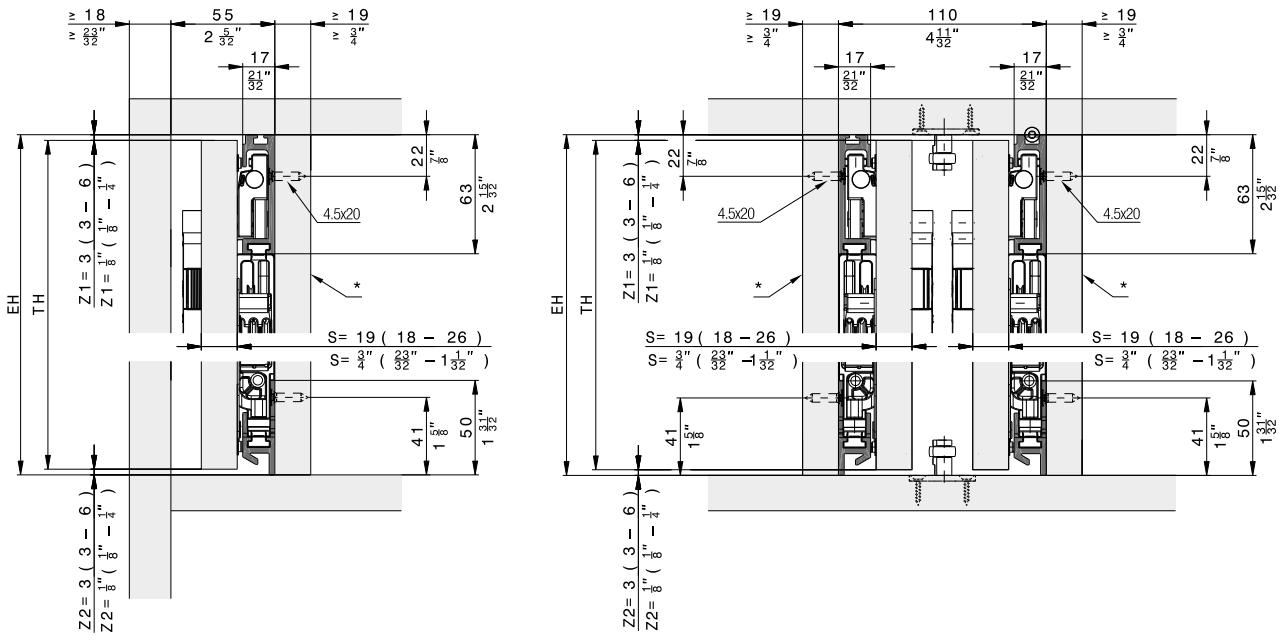


* removable

Floor-to-ceiling doors

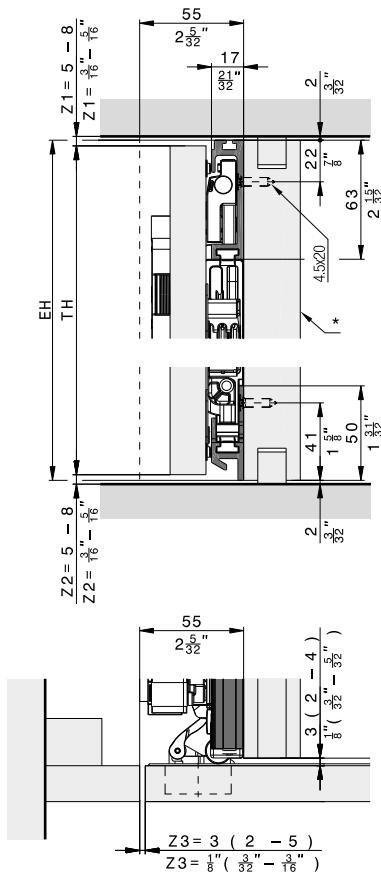


* removable

Hardware depth calculation

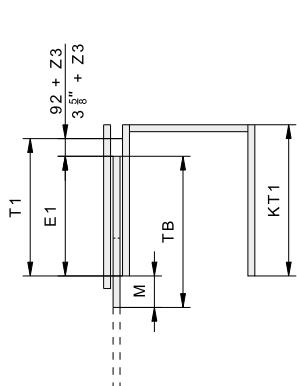


| | mm | Inch |
|----|------------|----------------------------|
| T1 | ≥ 414 | $\geq 1' 4 \frac{5}{16}''$ |

Door flush with outer face



Protruding door



| | mm | Inch |
|----|-----------------------------|-----------------------------------------------------------|
| T1 | $TB + 92 + Z3 - M$ | $TB + 3\frac{5}{8}'' + Z3 - M$ |
| E1 | $TB - M$ | $TB - M$ |
| M | $\geq S+3$ $\leq TB-320$ | $\geq S + \frac{5}{16}''$ $\leq TB - 1\frac{19}{32}''$ |

Instructions

- Installation** →
- Adjustment** →
- Connector** →

Videos

- Installation** →
- Adjustment** →
- Connector** →

Accessories

– Straightening fitting from page 265

Planning/execution

Configure with just a few clicks at www.hawa.com/configurator

Further information about the product can be found on www.hawa.com.


**Hardware for pivoting and lateral sliding in of wooden doors up to 35 kg (77 lbs.).
Uniform, flush front design with even gap pattern. Pull version with handle and integrated soft closing mechanism.**

Product highlights

-  **Productivity** Easy installation thanks to high degree of pre-assembly with intuitive adjustment
-  **Comfort** Ergonomic movement support for even, smooth movement
-  **Aesthetics** Allows constructions with and without handle – the technology remains invisible



Technical specifications

-  Weight: 10–35 kg (22 to 77 lbs.)
-  Height: 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")
-  Width: 440–750 mm (1' 5 5/16" to 2' 5 17/32")
-  Depth: 18–26 mm (23/32" to 1 1/32")


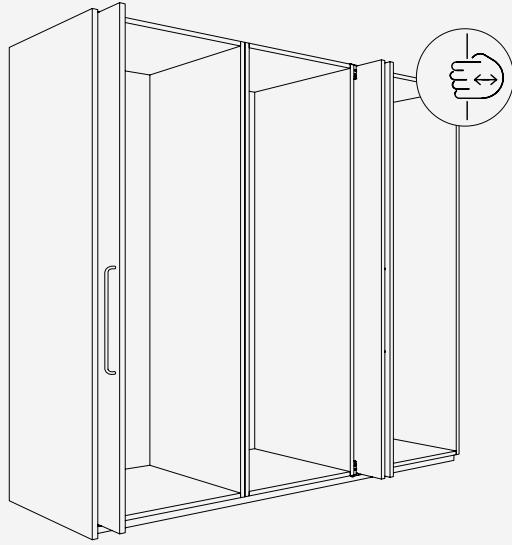


Installation examples

Door striking against the top and bottom cabinet sections

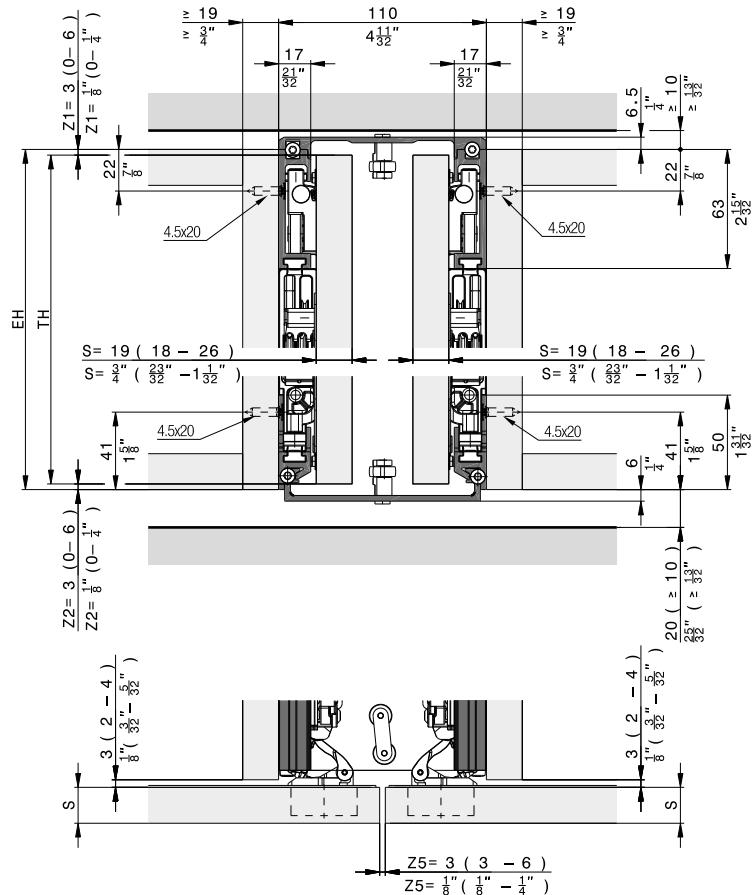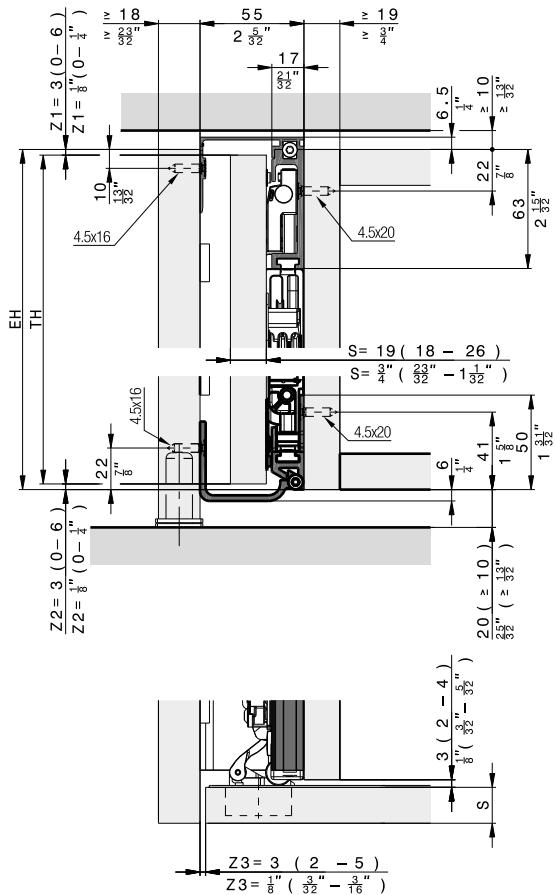

Components required for one cabinet



Hawa Concepta III 35 Pull, left

| | No. |
|-------------------------------------------------------------------------------------------------------------------------|-------|
| Hawa Concepta III 35, basic set left, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16") | 30996 |
| Hawa Concepta III 25/35, Pull slide-in set, left | 31000 |
| Upright profile L= 2474 mm (8' 1 13/32"), for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized | 30771 |

Hawa Concepta III 35 Pull, right

| No. |
|-------------------------------------------------------------------------------------------------------------------------|
| Hawa Concepta III 35, basic set right, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16") |
| Hawa Concepta III 25/35, Pull slide-in set, right |
| Upright profile L= 2474 mm (8' 1 13/32"), for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized |

Weight and door size ratio calculations

The maximum weight must be adapted depending on the door size ratio.

DE Türbreite / FR Largeur de porte / EN Door width / IT Larghezza anta / ES Ancho de puerta

DE Türhöhe / FR Hauteur de porte / EN Door height / IT Altura ante / ES Altura de puerta

| | 440 | 500 | 550 | 600 | 650 | 700 | 750 |
|------|-----|-----|-----|-----|-----|-----|-----|
| 2700 | 35 | 35 | 35 | 35 | 35 | 35 | 35 |
| 2650 | 35 | 35 | 35 | 35 | 35 | 35 | 35 |
| 2600 | 35 | 35 | 35 | 35 | 35 | 35 | 35 |
| 2550 | 35 | 35 | 35 | 35 | 35 | 35 | 35 |
| 2500 | 35 | 35 | 35 | 35 | 35 | 35 | 35 |
| 2450 | 35 | 35 | 35 | 35 | 35 | 35 | 34 |
| 2400 | 35 | 35 | 35 | 35 | 35 | 35 | 33 |
| 2350 | 35 | 35 | 35 | 35 | 35 | 34 | 32 |
| 2300 | 35 | 35 | 35 | 35 | 35 | 34 | 31 |
| 2250 | 35 | 35 | 35 | 35 | 35 | 33 | 31 |
| 2200 | 35 | 35 | 35 | 35 | 34 | 32 | 30 |
| 2150 | 35 | 35 | 35 | 35 | 33 | 31 | 29 |
| 2100 | 35 | 35 | 35 | 35 | 32 | 30 | 28 |
| 2050 | 35 | 35 | 35 | 34 | 31 | 29 | 27 |
| 2000 | 35 | 35 | 35 | 33 | 30 | 28 | 26 |
| 1950 | 35 | 35 | 35 | 32 | 29 | 27 | 26 |
| 1900 | 35 | 35 | 34 | 31 | 29 | 27 | 25 |

DE Maximale Gewichte in kg / FR Poids de porte en kg / EN Maximum weights in kg / IT Pesi massimo in kg / ES Pesos máximos en kg

| | 1' 5 5/16" | 1' 7 11/16" | 1' 9 21/32" | 1' 11 5/8" | 2' 1 19/32" | 2' 3 9/16" | 2' 5 17/32" |
|--------------|------------|-------------|-------------|------------|-------------|------------|-------------|
| 8' 10 5/16" | 77 | 77 | 77 | 77 | 77 | 77 | 77 |
| 8' 8 11/32" | 77 | 77 | 77 | 77 | 77 | 77 | 77 |
| 8' 6 3/8" | 77 | 77 | 77 | 77 | 77 | 77 | 77 |
| 8' 4 13/32" | 77 | 77 | 77 | 77 | 77 | 77 | 77 |
| 8' 2 7/16" | 77 | 77 | 77 | 77 | 77 | 77 | 77 |
| 8' 0 15/32" | 77 | 77 | 77 | 77 | 77 | 77 | 75 |
| 7' 10 1/2" | 77 | 77 | 77 | 77 | 77 | 77 | 73 |
| 7' 8 17/32" | 77 | 77 | 77 | 77 | 77 | 75 | 71 |
| 7' 6 9/16" | 77 | 77 | 77 | 77 | 77 | 75 | 68 |
| 7' 4 19/32" | 77 | 77 | 77 | 77 | 77 | 73 | 68 |
| 7' 2 5/8" | 77 | 77 | 77 | 77 | 75 | 71 | 66 |
| 7' 0 21/32" | 77 | 77 | 77 | 77 | 73 | 68 | 64 |
| 6' 10 11/16" | 77 | 77 | 77 | 77 | 71 | 66 | 62 |
| 6' 8 23/32" | 77 | 77 | 77 | 75 | 68 | 64 | 60 |
| 6' 6 3/4" | 77 | 77 | 77 | 73 | 66 | 62 | 57 |
| 6' 4 25/32" | 77 | 77 | 77 | 71 | 64 | 60 | 57 |
| 6' 2 13/16" | 77 | 77 | 75 | 68 | 64 | 60 | 55 |

DE Türgewicht in kg / FR Poids de porte en kg / EN Door weight in kg / IT Peso ante in kg / ES Peso de puerta en kg

DE Maximale Gewichte in kg / FR Poids de porte en kg / EN Maximum weights in lbs. / IT Pesi massimo in lbs. / ES Pesos máximos en lbs.


Hawa Configurator

www.hawa.com/configurator →




List of individual parts, which are included in the sets:

Set for 1 pivot /slide-in door up to 35 kg (77 lbs.)



| | No. |
|----------------------------------------------------------------------------------------------|-------|
| Hawa Concepta III 35, basic set left, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16") | 30996 |
| Hawa Concepta III 35, basic set right, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16") | 30997 |

| Set consisting of: | 30996 | 30997 | No. |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|-------|-------|
|  | Slot nuts for hinge attachment, plastic, black | 4 | 30686 |
|  | Mounting plate for hinge with height adjustment, steel, nickel-plated | 1 | 30738 |
|  | Concealed hinge, with soft closing mechanism and closing spring, steel, nickel plated | 4 | 31070 |
|  | Set for concealed hinges, 8 screws 4x16 mm (5/32"x5/8"), 3 door stop buffers | 1 | 30811 |
|  | Profile for magnetic guide, with double-sided adhesive tape, steel, black, L=730 mm (2' 4 3/4") | 2 | 30983 |
|  | Euro screw, 6x13 mm (1/4"x1/2"), steel, black, set of 6 pieces | 1 | 30986 |
|  | Bottom guide track left, aluminum, anodized, L= 838 mm (2' 9") | 1 | 30805 |
|  | Top running track left, aluminum, anodized, L= 838 mm (2' 9") | 1 | 31059 |
|  | Countersunk head screw, 4.5x20 mm (5/32"x25/32"), steel, zinc-plated, set of 16 pieces | 1 | 30810 |
|  | Set of adjusting tools | 1 | 31047 |
|  | Bottom guide track right, aluminum, anodized, L= 838 mm (2' 9") | 1 | 30806 |
|  | Top running track right, aluminum, anodized, L= 838 mm (2' 9") | 1 | 31060 |

Suitable slide-in set

| | No. |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|
| Hawa Concepta III 25/35, Pull slide-in set, left | 31000 |
| Hawa Concepta III 25/35, Pull slide-in set, right | 31001 |
| | No. |
| 31000 | 31001 |
| Set consisting of: | |
|  | Hawa Concepta III 25/35 Pull slide-in unit, left |
|  | End stop bracket Pull, steel zinc-plated |
|  | Soft closing mechanism with end stop |
|  | Hawa Concepta III Pull set of cover caps, for left-hand stop, plastic, black |
|  | Hawa Concepta III 25/35 Pull slide-in unit, right |
|  | Hawa Concepta III Pull set of cover caps, for right-hand stop, plastic, black |

Cabinet connecting parts

| | | mm (inch) | No. |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|----------------------|-------|
|  | Connector set 55 mm (2 5/32"), for exterior connection to cabinet | 560 (1' 10 1/16") | 31005 |
|  | Connector top 55 mm (2 5/32"), for exterior connection to cabinet | 560 (1' 10 1/16") | 31430 |
|  | Connector top 110 mm (4 11/32"), for two pivot/slide-in doors | 500 (1' 7 11/16") | 31006 |
|  | Connector bottom 110 mm (4 11/32"), for two pivot/slide-in doors | 500 (1' 7 11/16") | 31246 |
|  | Connector bottom 110 mm (4 11/32"), for two pivot/slide-in doors (for installation in front of fixed plinth) | 26 (1 1/32") | 31007 |

Guides

| | | No. |
|-------------------------------------------------------------------------------------|---------------------------------------------------|-------|
|  | Guide for two inset pivot sliding doors, aluminum | 25680 |

Accessories

| | | No. |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|-------|
|  | Support for Halemeier automatic shut-off device Matching push button item 36 979 01 for Halemeier automatic shut-off device (Safety Box) | 31020 |


Straightening fitting

→ Details under accessories from page 265


Aluminum raw

| | Nr. |
|-----------------------------------------------------------------------------------|--------------|
|  | 056.3192.072 |
|  | 056.3192.079 |


Aluminum anodized

| | No. |
|-------------------------------------------------------------------------------------|--------------|
|  | 056.3192.071 |
|  | 056.3192.082 |
|  | 056.3192.080 |

Aluminum black anodized




| | No. |
|-------------------------------------------------------------------------------------|--------------|
|  | 056.3192.074 |
|  | 056.3192.075 |
|  | 056.3192.081 |

Straightening fitting


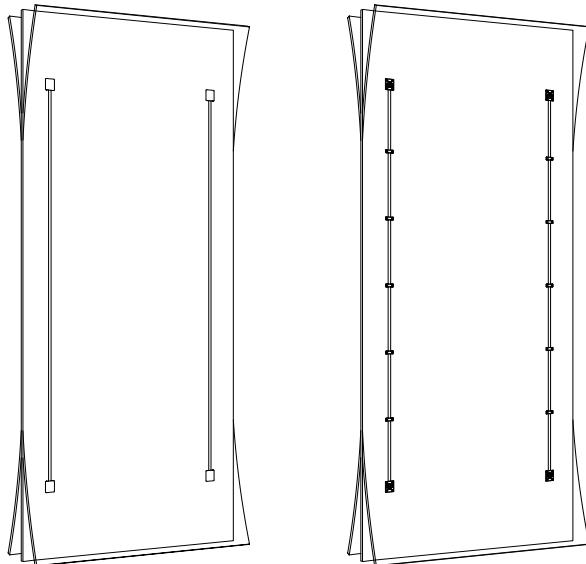


Further installation examples


Composed cabinet

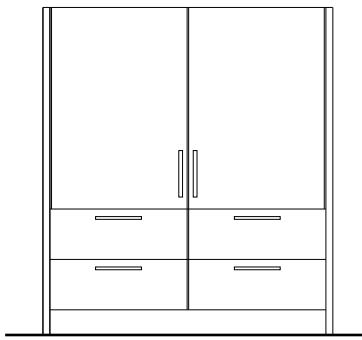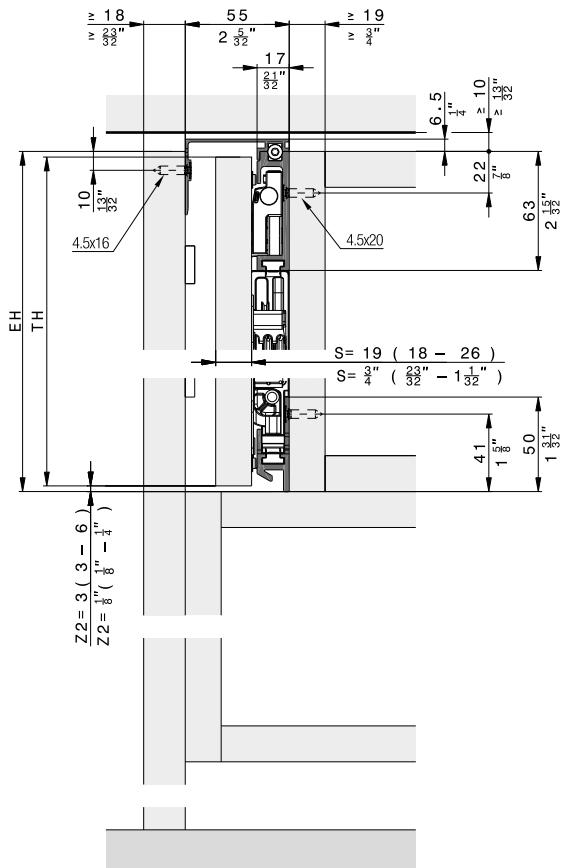

Cabinet without base panel

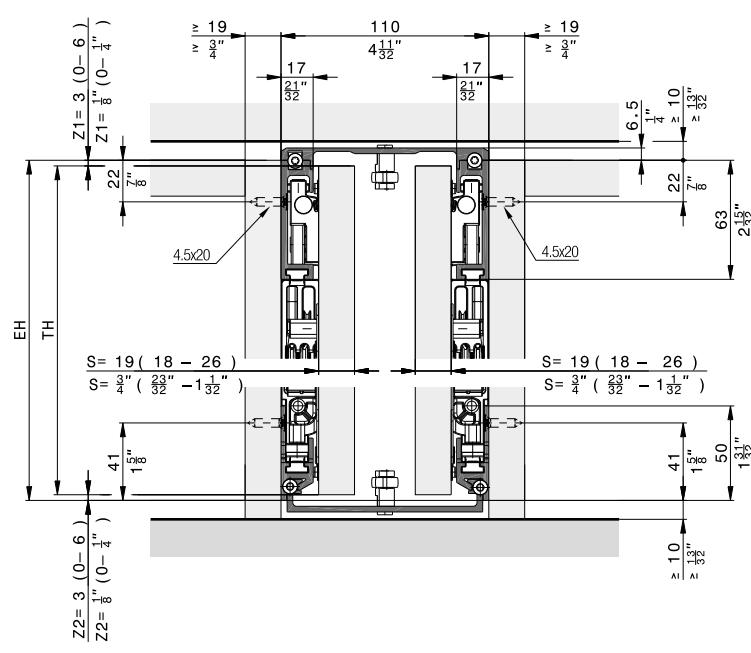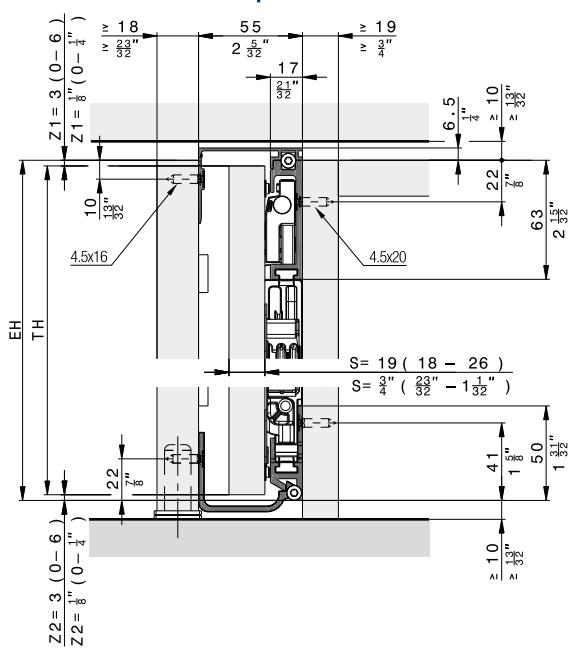


Inlaid doors

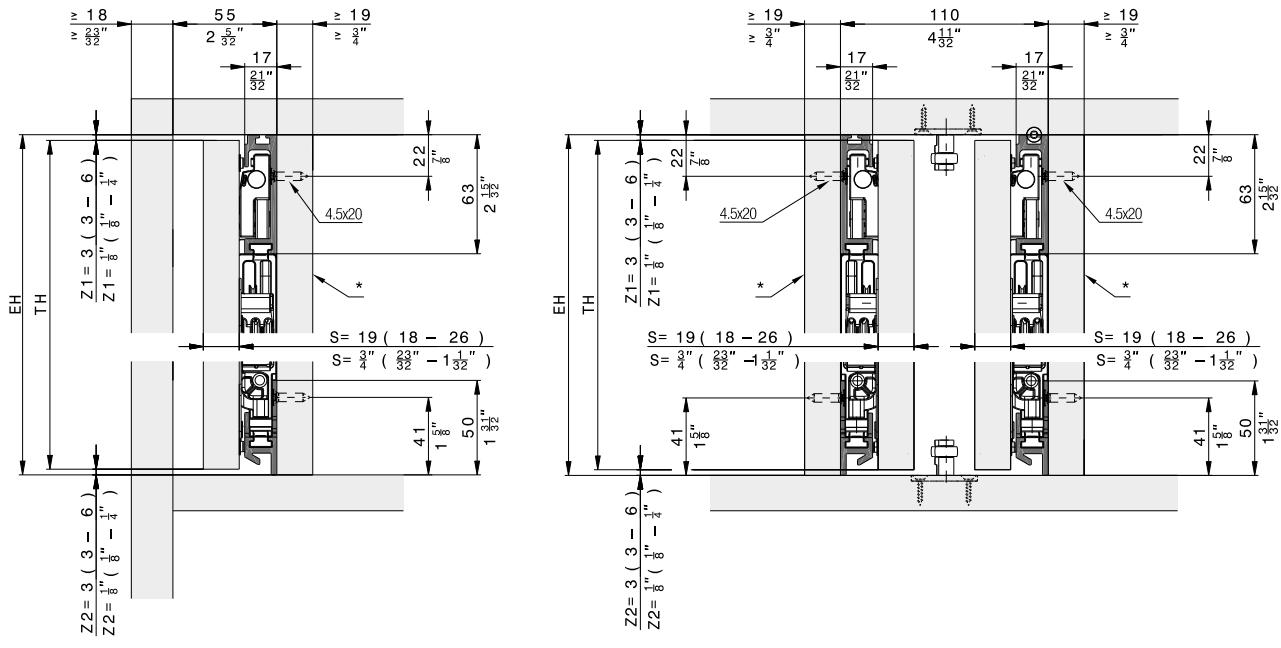


* removable

Floor-to-ceiling doors

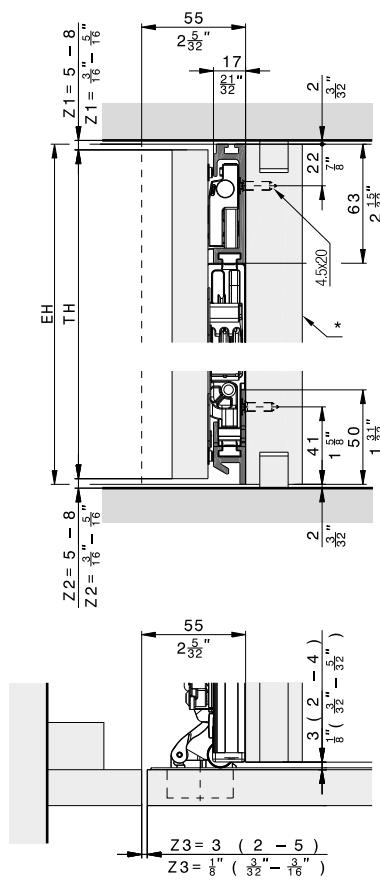

* removable


Hardware depth calculation

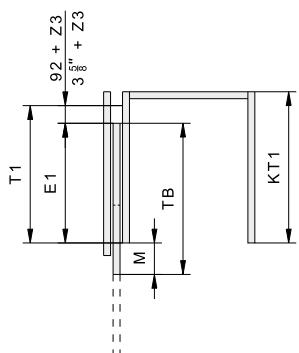


| | mm | Inch |
|----|------------|----------------------------|
| T1 | ≥ 414 | $\geq 1' 4 \frac{5}{16}''$ |

| | mm | Inch |
|----|---------------------------------|------------------------------------------------------------|
| T1 | $TB + 92 + Z3 - M$ | $TB + 3 \frac{5}{8}'' + Z3 - M$ |
| E1 | $TB - M$ | $TB - M$ |
| M | $\geq S + 3$ $\leq TB - 320$ | $\geq S + \frac{5}{16}''$ $\leq TB - 1 \frac{19}{32}''$ |

Door flush with outer face



Protruding door



Instructions

- Installation** →
- Adjustment** →
- Connector** →

Videos

- Installation** →
- Adjustment** →
- Connector** →

Accessories

– Straightening fitting from page 265

Planning/execution

Configure with just a few clicks at www.hawa.com/configurator

Further information about the product can be found on www.hawa.com.